NOTUS 25 TRIMLESS A

540 variants

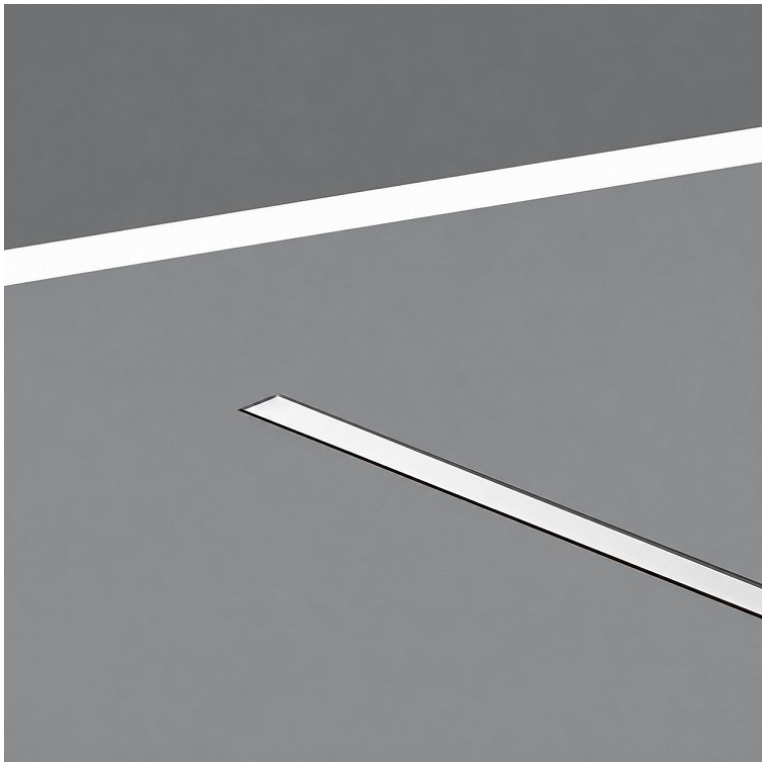

Dimensions



Available colours

White **Black** **Grey**

NOTUS 25 TRIMLESS A is a recessed linear luminaire with an aluminium body and 49 mm width, 72 mm height, 585–4536 mm length. It suits homes, offices, hotels and commercial spaces where the ceiling needs to remain clean and the lighting should integrate quietly into the architecture. The profile family can create clean linear runs, with production up to 4500 mm per single profile where the version allows it and dedicated connectors for longer continuous compositions. In recessed installations, the feed can be organised inside the false ceiling or installation void, keeping the final ceiling line clean. It is available in white, black and grey finishes, with special RAL colours available on request for project-specific schemes. On-Off, DALI2 and Casambi options allow the luminaire to support anything from simple operation to more advanced lighting control in professional projects. The recessed installation keeps the ceiling clean and allows the luminaire to work without drawing excessive attention. Suitable for recessed installation in outdoor ceilings, with IP54 protection. The standard colours white, black and grey have a textured finish.

LUMINAIRE POWER

11.3 - 135.1 W

LUMINAIRE LUMINOUS FLUX

857 - 10,853 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of NOTUS 25 TRIMLESS A.

Mounting position	**Ceiling Recessed**	Power factor	**0.96**
Housing	**Aluminium**	Protection rating	**IP54 / IK04**
Light source	**Linear LED**	Insulation class	**Class I**
Control Gear	**Built-in ECG**	Lifetime	**>80.000h L80B10@35°C**
Colour uniformity	**3 SDCM**	Operating temperature	**-10…+45°C**
Ripple	**3**	Operating humidity	**5…95%**
Operating voltage	**230 V**	Lighting direction	**Downwards**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 104° (VW) | Control On-Off, DALI2, DALI2 + Casambi | Optic PMMA, Anti-Glare PC Shade | Accessories CONVERSIONKIT+BATTERY, COVER IP54, CONVERSIONKIT+BATTERY

Luminous efficacy 75.5 - 80.4 lm/W | UGR longwise / parallel 24 - 25 / 24 - 26 | Length 585 - 4,536 mm | Width 49 mm | Height 72 mm

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	104°	11.3 - 135.1	**857 - 10,282**
940	4000 K	104°	11.3 - 135.1	**908 - 10,853**

Luminous flux range per version

Minimum 857 lm / 11.3 W / 930 / PRT0017CL001ON

Maximum 10,853 lm / 135.1 W / 940 / PRT0076CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >