SEDO 7 CURA SP

63 variants



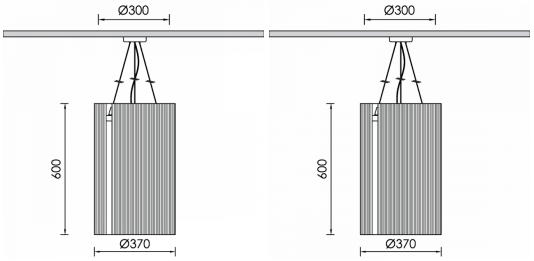

Available colours

Black | **Hillswick (EJ190)** | **Fair Isle (EJ186)** | **Maree (EJ195)** | **Inverness (EJ175)** | **Galilee (EJ125)** | **Pitlochry (EJ076)**

SEDO 7 CURA SP features changeable CCT: 3000 / 4000 / 6000 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power, dimensions and other specifications are listed for each variant. The listed luminous flux corresponds to the 4000 K reference setting where documented.

LUMINAIRE POWER

24 W

LUMINAIRE LUMINOUS FLUX

2,808 - 3,360 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of SEDO 7 CURA SP.

Mounting position	**Pendant**	Operating voltage	**230 V**
Housing	**Acoustic Panel**	Power factor	**0.96**
Optic	**PMMA**	Protection rating	**IP20 / IK03**
Light source	**COB LED**	Insulation class	**Class I**
Body dimensions	**Ø 370 × 600 mm**	Operating temperature	**-10…+45°C**
Control Gear	**Built-in ECG**	Operating humidity	**5…95%**
Colour uniformity	**3 SDCM**	Lighting direction	**Downwards**
Ripple	**3**	Accessories	**AUTO WIRE SUPPORT BLOCK**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 110° (VW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 117 - 140 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	110°	24	**2,808**
940	4000 K	110°	24	**3,048**
960	6000 K	110°	24	**3,360**

Luminous flux range per version

Minimum 2,808 lm / 24 W / 930 / PRA0438CL002ON

Maximum 3,360 lm / 24 W / 960 / PRA0440CL002ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >