

SEDO LATER SQUARE

48 variants

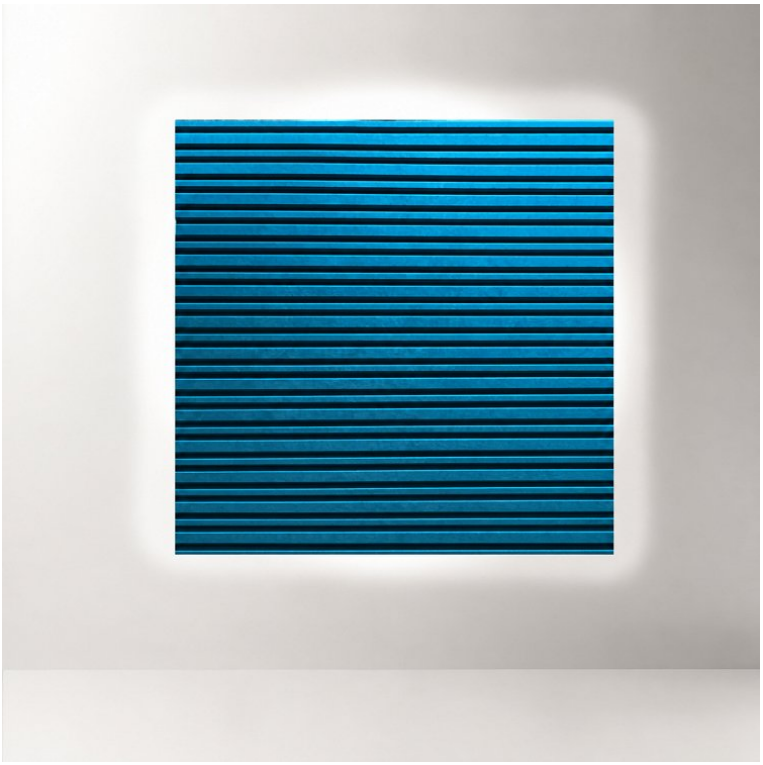

Dimensions



Available colours

Lagoon (4014) **Jungle (4012)** **Cloud (4006)** **Volcano (4002)**

SEDO LATER SQUARE is a linear wall luminaire with a acoustic frame and 220–320 mm width, 58 mm height, 220–320 mm length. It is suitable for offices, retail spaces, hospitality, homes and architectural compositions where the light line becomes part of the spatial layout. It is available in multiple finish options, with special RAL colours available on request for project-specific schemes. On-Off, DALI2 and Casambi options allow the luminaire to support anything from simple operation to more advanced lighting control in professional projects. On the wall, it works as a lighting element that adds depth, texture or emphasis without requiring an intense luminous presence.

LUMINAIRE POWER

6.4 - 12.8 W

LUMINAIRE LUMINOUS FLUX

108 - 262 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of SEDO LATER SQUARE.

Mounting position	**Wall Mounted**	Power factor	**0.96**
Housing	**Acoustic Panel**	Protection rating	**IP20 / IK05**
Light source	**LED Strip**	Insulation class	**Class I**
Control Gear	**Built-in ECG**	Lifetime	**>50.000h L70B10@35°C**
Colour uniformity	**3 SDCM**	Operating temperature	**-10…+45°C**
Ripple	**3**	Operating humidity	**5…95%**
Operating voltage	**230 V**	Lighting direction	**Downwards**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 180° (VW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 15.2 - 20.9 lm/W | Length 220 - 320 mm | Width 220 - 320 mm | Height 58 mm

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	180°	6.4 - 12.8	**108 - 195**
940	4000 K	180°	6.4 - 12.8	**134 - 262**

Luminous flux range per version

Minimum 108 lm / 6.4 W / 930 / PRA0558CL017ON

Maximum 262 lm / 12.8 W / 940 / PRA0561CL017ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >