GENUS

18 variants



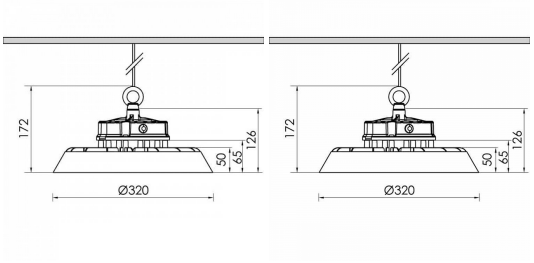

GENUS features changeable CCT: 3000 / 4000 / 5700 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power, dimensions and other specifications are listed for each variant. The listed luminous flux corresponds to the 4000 K reference setting where documented.

LUMINAIRE POWER

120 - 200 W

LUMINAIRE LUMINOUS FLUX

17,400 - 31,000 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of GENUS.

Mounting position	**Pendant**	Power factor	**0.96**
Housing	**Aluminium**	Protection rating	**IP65**
Light source	**H.P. LED**	Operating temperature	**-10…+45°C**
Body dimensions	**Ø 320 × 126 mm**	Operating humidity	**5…95%**
Colour uniformity	**3 SDCM**	Lighting direction	**Downwards**
Ripple	**3**		

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 69° (XW), 93° (XW) | Control On-Off

Luminous efficacy 145 - 155 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	69°, 93°	120 - 200	**17,400 - 29,000**
957	5700 K	69°, 93°	120 - 200	**18,600 - 31,000**

Luminous flux range per version

Minimum 17,400 lm / 120 W / 930 / HB0009

Maximum 31,000 lm / 200 W / 957 / HB0017

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >