# CURA SP

**72 variants**



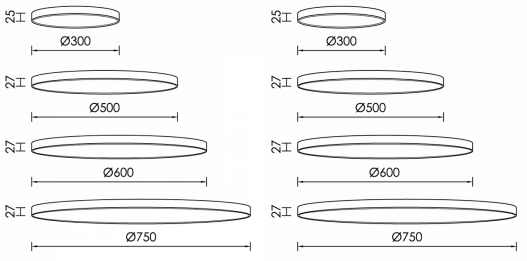


**Available colours**

**White** **Black**

CURA SP features changeable CCT: 3000 / 4000 / 6000 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power, dimensions and other specifications are listed for each variant. The listed luminous flux corresponds to the 4000 K reference setting where documented.

**LUMINAIRE POWER**

24 - 60 W

**LUMINAIRE LUMINOUS FLUX**

2,808 - 8,400 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

**See all variants on bright.gr** >

# Technical characteristics

## Common data

Characteristics that apply to all versions of CURA SP.

| | | | |
|---|---|---|---|
| Mounting position | **Pendant** | Ripple | **3** |
| Housing | **ABS** | Power factor | **0.96** |
| Optic | **PMMA** | Operating temperature | **-10…+45°C** |
| Light source | **COB LED** | Operating humidity | **5…95%** |
| Control Gear | **Built-in ECG** | Lighting direction | **Downwards** |
| Colour uniformity | **3 SDCM** | Accessories | **AUTO WIRE SUPPORT BLOCK** |

**Markings and catalogue references** **CE • LM80 • LM79 • TM21 • REACH**

## Options per version

**Beams 110° (VW) | Control On-Off, DALI2, DALI2 + Casambi**

Luminous efficacy 117 - 140 lm/W | Height 27 mm | Diameter 300 - 750 mm

| CRI/CCT | Colour temperature | Beams | Power (W) | Luminous flux (lm) |
|---|---|---|---|---|
| **930** | 3000 K | 110° | 24 - 60 | **2,808 - 7,020** |
| **940** | 4000 K | 110° | 24 - 60 | **3,048 - 7,800** |
| **960** | 6000 K | 110° | 24 - 60 | **3,360 - 8,400** |

### Luminous flux range per version

Minimum 2,808 lm / 24 W / 930 / DES0033CL001ON

Maximum 8,400 lm / 60 W / 960 / DES0044CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

**See all variants on bright.gr** >