
NOTUS 25 DAISY CEILING

36 variants



Dimensions

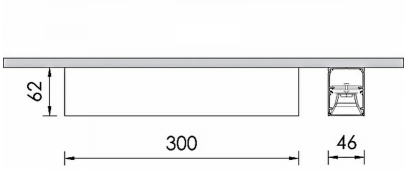

Available colours

White **Black** **Grey**

NOTUS 25 DAISY CEILING is a ceiling luminaire with an aluminium body and 46 mm width, 62 mm height. It can be used in projects that require a clean appearance, reliable operation and adaptation to the needs of the space. Symmetric and asymmetric distributions are available. The symmetric optic lights the area below the luminaire, while the asymmetric optic directs light to one side for walls, circulation areas or shelving. Low glare combined with CRI90 makes it suitable for projects with high visual-comfort requirements, including offices, hospitality spaces and WELL or LEED-oriented applications. It is available in black, white and grey finishes, with special RAL colours available on request for project-specific schemes. On-Off, DALI2 and Casambi options allow the luminaire to support anything from simple operation to more advanced lighting control in professional projects. The standard colours white, black and grey have a textured finish.

LUMINAIRE POWER

6.4 W

LUMINAIRE LUMINOUS FLUX

779 - 817 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of NOTUS 25 DAISY CEILING.

Mounting position	**Ceiling**	Power factor	**0.96**
Housing	**Aluminium**	Protection rating	**IP20 / IK04**
Light source	**Linear LED**	Insulation class	**Class I**
Body dimensions	**46 × 300 × 62 mm**	Lifetime	**>80.000h L80B10@35°C**
Control Gear	**Built-in ECG**	Operating temperature	**-10…+45°C**
Colour uniformity	**3 SDCM**	Operating humidity	**5…95%**
Ripple	**3**	Lighting direction	**Downwards**
Operating voltage	**230 V**		

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 53° (ASY), 80° (XW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 122.7 - 128.7 lm/W | UGR longwise / parallel 14 - 15 / 15

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	53°, 80°	6.4	**779**
940	4000 K	53°, 80°	6.4	**817**

Luminous flux range per version

Minimum 779 lm / 6.4 W / 930 / CM0262CL002ON

Maximum 817 lm / 6.4 W / 940 / CM0263CL002ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >