
MORA

18 variants



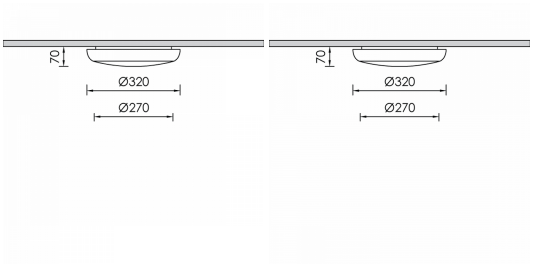

Available colours

White **Black**

MORA features changeable CCT: 3000 / 4000 / 6500 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power, dimensions and other specifications are listed for each variant. The listed luminous flux corresponds to the 4000 K reference setting where documented.

LUMINAIRE POWER

20 W

LUMINAIRE LUMINOUS FLUX

1,800 - 2,320 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of MORA.

Mounting position	**Ceiling**
Housing	**Polycarbonate**
Light source	**SMD LED**
Body dimensions	**Ø 320 × 70 mm**
Control Gear	**Built-in ECG**
Colour uniformity	**3 SDCM**

Ripple	**3**
Power factor	**0.96**
Protection rating	**IP65 / IK10**
Lighting direction	**Downwards**
Accessories	**CONVERSION KIT + BATTERY, MICROWAVE SENSOR**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 119° (VW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 90 - 116 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
865	6500 K	119°	20	**2,320**
930	3000 K	119°	20	**1,800**
940	4000 K	119°	20	**1,889**

Luminous flux range per version

Minimum 1,800 lm / 20 W / 930 / CM0588CL001ON

Maximum 2,320 lm / 20 W / 865 / CM0590CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >