
NOXA

148 variants



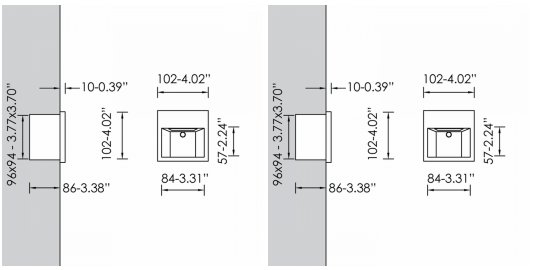

Available colours

White | Black | Grey | Anthracite

LUMINAIRE POWER

1.1 - 3.2 W

LUMINAIRE LUMINOUS FLUX

85 - 260 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of NOXA.

Mounting position	**Wall Recessed**	Protection rating	**IP65 / IK08**
Housing	**Aluminium**	Insulation class	**Class I**
Optic	**Opal Polycarbonate**	Lifetime	**>50.000h L80B10@35°C**
Control Gear	**Built-in ECG**	Operating temperature	**-20…+45°C**
Colour uniformity	**3 SDCM**	Operating humidity	**5…95%**
Ripple	**3**	Lighting direction	**Sideways**
Power factor	**0.96**	Accessories	**BOX**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams (ASY) | Control On-Off, DALI2, DALI2 + Casambi | Light source COB LED, G9 LED Lamp

Luminous efficacy 73.8 - 88.2 lm/W | Length 102 mm | Width 102 mm | Height 82 - 86 mm

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
927	2700 K		1.1 - 3.2	**85 - 236**
930	3000 K		1.1 - 3.2	**88 - 242**
940	4000 K		1.1 - 3.2	**97 - 260**

Luminous flux range per version

Minimum 85 lm / 1.1 W / 927 / WF0206CL001ON

Maximum 260 lm / 3.2 W / 940 / WF0217CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >

www.bright.gr | NOXA | Family technical datasheet