

COMIS 5

18 variants

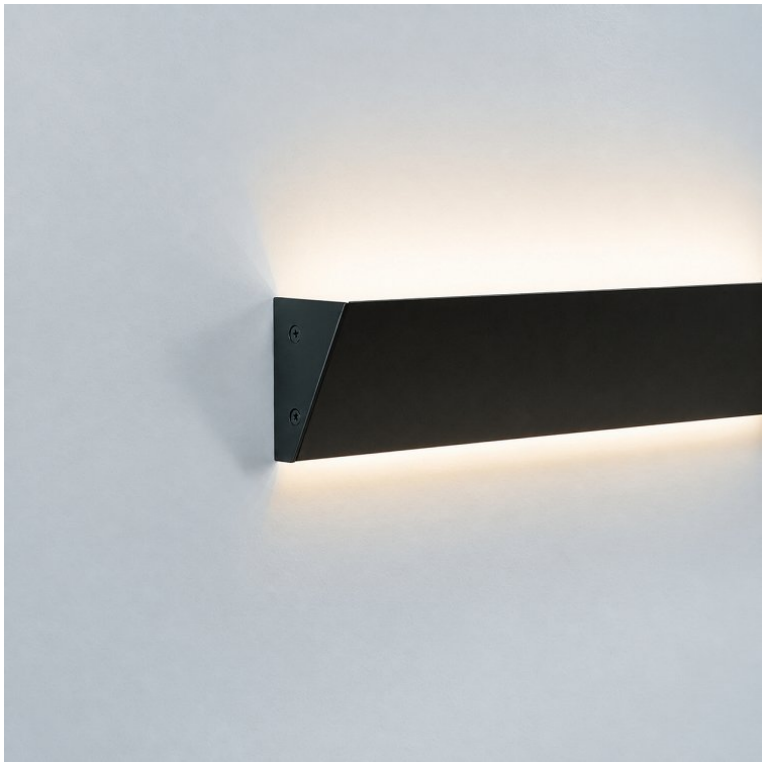

Dimensions



Available colours

White **Black** **Anodized grey**

COMIS 5 is an LED wall luminaire made of aluminium. The body has a length of 1000 mm, width of 56.7 mm and height of 79.5 mm. It adds a wall lighting point in homes, hotels and reception spaces. It complements the main lighting and draws attention to the area where it is installed. The 2700, 3000 and 4000 K options with CRI90 allow the lighting to match the colour appearance required in the space. It is available in matte white, matte black and anodized grey finishes. The construction is rated IP40 with an impact rating of IK04. The profile is available in lengths up to 4,750 mm and can be cut or formed to suit project requirements. Dimensions and photometric data for each listed variant refer to its corresponding reference length.

LUMINAIRE POWER

10 - 15.6 W

LUMINAIRE LUMINOUS FLUX

592 - 1,000 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of COMIS 5.

Mounting position	**Wall Mounted**	Power factor	**0.96**
Housing	**Aluminium**	Protection rating	**IP40 / IK04**
Light source	**LED Strip**	Lifetime	**: >50.000h | L80B10 | Energy Saving A+**
Body dimensions	**56.7 × 1000 × 79.5 mm**	Lighting direction	**Upwards**
Markings and catalogue references	**CE**		

Options per version

Control On-Off

Luminous efficacy 59.2 - 64 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
927	2700 K		10 - 15.6	**592 - 925**
930	3000 K		10 - 15.6	**616 - 963**
940	4000 K		10 - 15.6	**640 - 1,000**

Luminous flux range per version

Minimum 592 lm / 10 W / 927 / DEW0165CL001ON

Maximum 1,000 lm / 15.6 W / 940 / DEW0170CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >