

# DECUS 3

**9 variants**

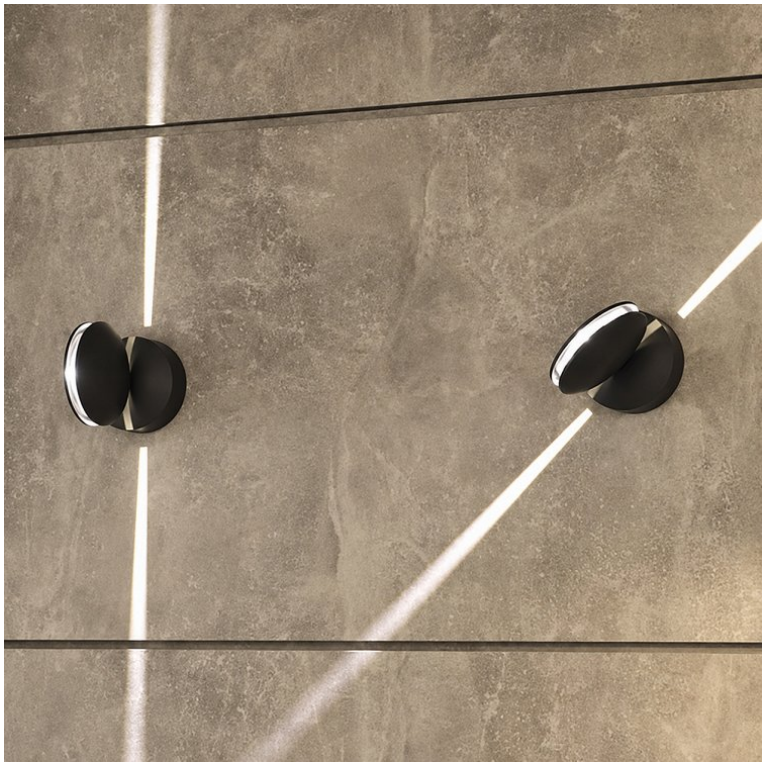

## Dimensions




## Available colours

**Dark Grey**

DECUS 3 is an LED facade luminaire made of aluminium. The body has a diameter of 118 mm and height of 166 mm. It is intended to highlight architectural surfaces and details. The compact body allows it to be positioned close to the illuminated feature. It can be installed on a wall, on the floor and on the ceiling, depending on the version and mounting arrangement. The head offers horizontal adjustment through 355°. The 2700, 3000 and 4000 K options with CRI90 allow the lighting to match the colour appearance required in the space. The finish is dark grey. Control is available through On-Off and DALI2, with Casambi available in the corresponding version, to suit the lighting control requirements of the project. The construction is rated IP54.

**LUMINAIRE POWER**

8 W

**LUMINAIRE LUMINOUS FLUX**

62 - 142 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

**See all variants on bright.gr** >

# Technical characteristics

## Common data

Characteristics that apply to all versions of DECUS 3.

| | | | |
|---|---|---|---|
| Mounting position | **Ceiling, Wall Mounted, Floor, Amenity** | Control Gear | **Built-in ECG** |
| Housing | **Aluminium** | Operating voltage | **230 V** |
| Light source | **SMD LED** | Protection rating | **IP54** |
| Body dimensions | **Ø 118 × 166 mm** | | |
| **Markings and catalogue references** | **CE** | | |

## Options per version

**Beams 3x210° (ASY) | Control On-Off, DALI2, DALI2 + Casambi**

Luminous efficacy 7.8 - 17.8 lm/W

| CRI/CCT | Colour temperature | Beams | Power (W) | Luminous flux (lm) |
|---|---|---|---|---|
| **927** | 2700 K | 3x210° | 8 | **62** |
| **930** | 3000 K | 3x210° | 8 | **102** |
| **940** | 4000 K | 3x210° | 8 | **142** |

### Luminous flux range per version

Minimum 62 lm / 8 W / 927 / FA4045CL103ON

Maximum 142 lm / 8 W / 940 / FA4047CL103ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

**See all variants on bright.gr >**