
GENUS 9

48 variants



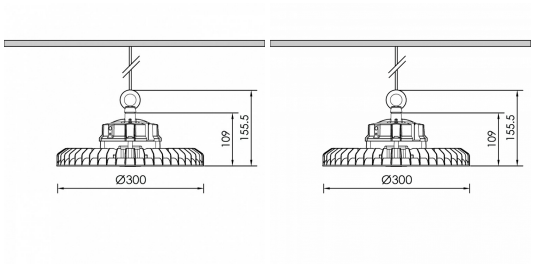

GENUS 9 features changeable CCT: 3000 / 4000 / 5700 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power is selectable on the same luminaire (120 / 160 / 200 W). Luminous flux by power setting (3000 or 5700 K / 4000 K): 120 W: 18000 / 19200 lm / 160 W: 23200 / 24800 lm / 200 W: 28000 / 30000 lm. The luminous flux shown in the table refers to the 200 W reference setting at 4000 K. Where available, the photometric file represents the 200 W, 4000 K setting. Luminous efficacy at the 200 W reference setting is 150 lm/W.

LUMINAIRE POWER

120 - 200 W

LUMINAIRE LUMINOUS FLUX

18,000 - 30,000 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of GENUS 9.

Mounting position	**Pendant**	Light source	**SMD LED**
Housing	**Aluminium**	Body dimensions	**Ø 300 × 155.5 mm**
Markings and catalogue references	**CE**		

Options per version

Beams 60° (W), 90° (VW), 120° (VW) | Control On-Off, DALI2

Luminous efficacy 140 - 160 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
830	3000 K	60°, 90°, 120°	120 - 200	**18,000 - 28,000**
840	4000 K	60°, 90°, 120°	120 - 200	**19,200 - 30,000**
857	5700 K	60°, 90°, 120°	120 - 200	**18,000 - 28,000**

Luminous flux range per version

Minimum 18,000 lm / 120 W / 830 / HB0158ON

Maximum 30,000 lm / HB0200ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >