

PURE 50 OPAL

8 variants

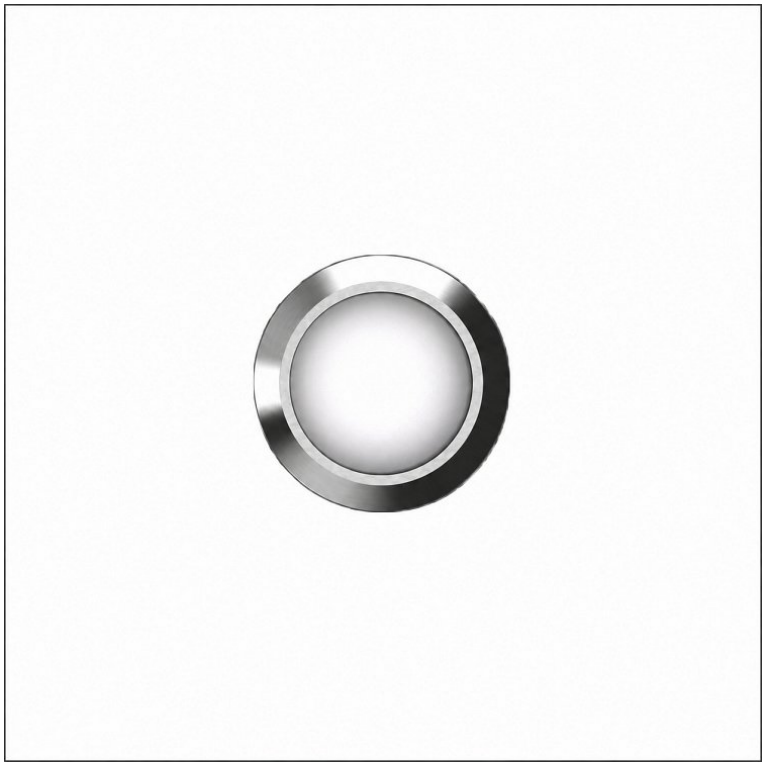

Dimensions



Available colours

Black **Inox**

PURE 50 OPAL is a recessed LED ground luminaire made of aluminium and stainless steel. The body has a diameter of 72 mm and height of 75 mm. The recessed installation integrates the fitting into paving and landscape layouts. It provides a lighting point for nearby surfaces and features while keeping the body visually unobtrusive above ground. The sandblasted glass surface diffuses light at the opening of the fitting. The 2700 K version has a colour rendering index of CRI80. It is available in black and stainless steel finishes. Control is available through On-Off and DALI2, to suit the lighting control requirements of the project. The construction is rated IP68 with an impact rating of IK10.

LUMINAIRE POWER

2 - 4 W

LUMINAIRE LUMINOUS FLUX

160 - 300 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of PURE 50 OPAL.

Mounting position	**Floor Recessed**	Control Gear	**Remote Electronic Driver**
Housing	**Aluminium, Stainless steel**	Protection rating	**IP68 / IK10**
Optic	**Sandblasted glass**	Insulation class	**Class III**
Light source	**SMD LED**	Lighting direction	**Upwards**
Body dimensions	**Ø 72 × 75 mm**	Accessories	**CLEAR GLASS**

Markings and catalogue references	**CE**

Options per version

Control On-Off, DALI2

Luminous efficacy 75 - 80 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
827	2700 K		2 - 4	**160 - 300**

Luminous flux range per version

Minimum 160 lm / 2 W / 827 / GR0479CL002ON

Maximum 300 lm / 4 W / 827 / GR0480CL002ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >