
LEGATUS SPOT 35 1F

216 variants



Dimensions

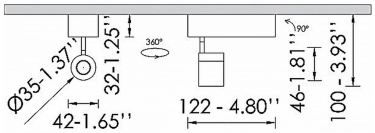

Available colours

White Black Grey Gold

LEGATUS SPOT 35 1F is a ceiling luminaire with an aluminium body and 42 mm diameter. It can be used in projects that require a clean appearance, reliable operation and adaptation to the needs of the space. It is available in white, black, grey and gold finishes, with special RAL colours available on request for project-specific schemes. On-Off, DALI2 and Casambi options allow the luminaire to support anything from simple operation to more advanced lighting control in professional projects.

LUMINAIRE POWER

2.4 - 6.2 W

LUMINAIRE LUMINOUS FLUX

261 - 675 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of LEGATUS SPOT 35 1F.

Mounting position	**Ceiling**	Power factor	**0.96**
Housing	**Aluminium**	Protection rating	**IP20 / IK05**
Light source	**COB LED**	Insulation class	**Class I**
Body dimensions	**Ø 42 × 46 mm**	Lifetime	**>60.000h L80B10@35°C**
Control Gear	**Built-in ECG**	Operating temperature	**-10…+45°C**
Colour uniformity	**3 SDCM**	Operating humidity	**5…95%**
Ripple	**3**	Lighting direction	**Sideways**
Operating voltage	**230 V**		

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 20 (NM), 40 (W), 60 (XW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 96.5 - 123.4 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	20, 40, 60	2.4 - 6.2	**261 - 600**
940	4000 K	20, 40, 60	2.4 - 6.2	**295 - 675**

Luminous flux range per version

Minimum 261 lm / 2.4 W / 930 / CM0190CL001ON

Maximum 675 lm / 6.2 W / 940 / CM0195CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >