CURA

72 variants



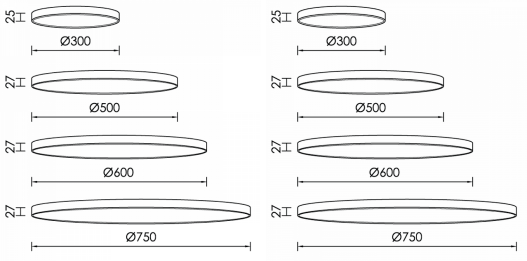

Available colours

White **Black**

CURA features changeable CCT: 3000 / 4000 / 6000 K. Colour temperature is selected using the switch on the luminaire. It is available with On-Off control. Power, dimensions and other specifications are listed for each variant. The listed luminous flux corresponds to the 4000 K reference setting where documented.

LUMINAIRE POWER

24 - 60 W

LUMINAIRE LUMINOUS FLUX

2,808 - 8,400 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of CURA.

Mounting position	**Ceiling**	Power factor	**0.96**
Housing	**ABS**	Protection rating	**IP20 / IK03**
Optic	**PMMA**	Insulation class	**Class I**
Light source	**COB LED**	Operating temperature	**-10…+45°C**
Control Gear	**Built-in ECG**	Operating humidity	**5…95%**
Colour uniformity	**3 SDCM**	Lighting direction	**Downwards**
Ripple	**3**	Accessories	**AUTO WIRE SUPPORT BLOCK**
Operating voltage	**230 V**		

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 110° (VW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 117 - 140 lm/W | UGR longwise / parallel 22 - 26 / 22 - 26 | Height 25 - 27 mm | Diameter 300 - 750 mm

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	110°	24 - 60	**2,808 - 7,020**
940	4000 K	110°	24 - 60	**3,048 - 7,800**
960	6000 K	110°	24 - 60	**3,360 - 8,400**

Luminous flux range per version

Minimum 2,808 lm / 24 W / 930 / CM0208CL001ON

Maximum 8,400 lm / 60 W / 960 / CM0219CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >