
ULNA 1F

441 variants



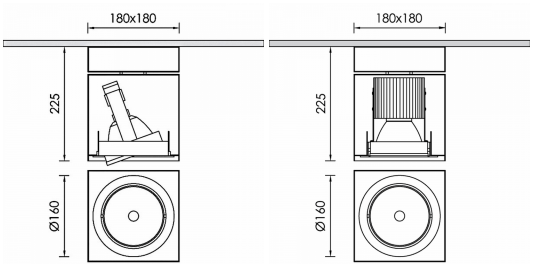

Available colours

White **Black** **Grey**

ULNA 1F is a ceiling luminaire for GU10, E27, COIN 111 and board-mounted LED sources, with a metal body and 180 mm width, 225 mm height. It can be used in projects that require a clean appearance, reliable operation and adaptation to the needs of the space. As the smaller version of the series, it keeps a lighter presence and can be combined with larger versions when different light levels are needed within the same project. The replaceable source gives flexibility in lamp selection and makes future maintenance or changes in lighting effect easier. It is available in black, white and grey finishes, with special RAL colours available on request for project-specific schemes.

LUMINAIRE POWER

12.8 - 40.4 W

LUMINAIRE LUMINOUS FLUX

1,458 - 4,484 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of ULNA 1F.

Mounting position	**Ceiling**
Housing	**Metal**
Body dimensions	**180 × 180 × 225 mm**
Control Gear	**Built-in ECG**
Colour uniformity	**3 SDCM**
Ripple	**3**
Operating voltage	**230 V**

Power factor	**0.96**
Insulation class	**Class I**
Lifetime	**>60.000h L80B10@35°C**
Operating temperature	**-10…+45°C**
Operating humidity	**5…95%**
Lighting direction	**Sideways**
Accessories	**FRESNEL FILTER, HONEY COMB R111, SHADER111, WALL WASHER, RGB CONTROLLER**

Markings and catalogue references	**CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 18° (N), 24° (NM), 36° (M), 60° (XW) | Control On-Off, DALI2, DALI2 + Casambi | Light source COB LED, GU10 LED Lamp, E27 LED Lamp, COIN 111 | Protection rating IP20 / IK07, IP20 / IK02

Luminous efficacy 99 - 119.7 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	18°, 24°, 36°, 60°	12.8 - 40.4	**1,458 - 4,279**
940	4000 K	18°, 24°, 36°, 60°	12.8 - 40.4	**1,532 - 4,484**

Luminous flux range per version

Minimum 1,458 lm / 12.8 W / 930 / CM0449CL002ON

Maximum 4,484 lm / 40.4 W / 940 / CM0460CL002ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >