
ULNA 2F

441 variants



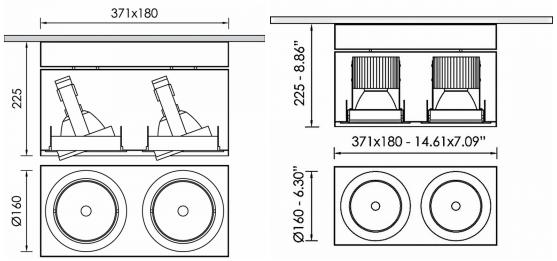

Available colours

White **Black** **Grey**

ULNA 2F is a ceiling luminaire for E27, COIN 111, GU10 and board-mounted LED sources, with a metal body and 180 mm width, 225 mm height. It can be used in projects that require a clean appearance, reliable operation and adaptation to the needs of the space. Its medium scale offers more light quantity and a larger body than the simpler versions, while keeping a related appearance within the series. The replaceable source gives flexibility in lamp selection and makes future maintenance or changes in lighting effect easier. It is available in black, white and grey finishes, with special RAL colours available on request for project-specific schemes.

LUMINAIRE POWER

25.6 - 80.8 W

LUMINAIRE LUMINOUS FLUX

2,916 - 8,968 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of ULNA 2F.

Mounting position	**Ceiling**
Housing	**Metal**
Body dimensions	**180 × 371 × 225 mm**
Control Gear	**Built-in ECG**
Colour uniformity	**3 SDCM**
Ripple	**3**
Operating voltage	**230 V**

Power factor	**0.96**
Insulation class	**Class I**
Lifetime	**>60.000h L80B10@35°C**
Operating temperature	**-10…+45°C**
Operating humidity	**5…95%**
Lighting direction	**Sideways**
Accessories	**FRESNEL FILTER, HONEY COMB R111, SHADER111, WALL WASHER, RGB CONTROLLER**

Markings and catalogue references	**CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 18° (N), 24° (NM), 36° (M), 60° (XW) | Control On-Off, DALI2, DALI2 + Casambi | Light source COB LED, E27 LED Lamp, COIN 111, GU10 LED Lamp | Protection rating IP20 / IK07, IP20 / IK02

Luminous efficacy 99 - 119.7 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	18°, 24°, 36°, 60°	25.6 - 80.8	**2,916 - 8,558**
940	4000 K	18°, 24°, 36°, 60°	25.6 - 80.8	**3,064 - 8,968**

Luminous flux range per version

Minimum 2,916 lm / 25.6 W / 930 / CM0500CL002ON

Maximum 8,968 lm / 80.8 W / 940 / CM0511CL002ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >