

XTS

12 variants

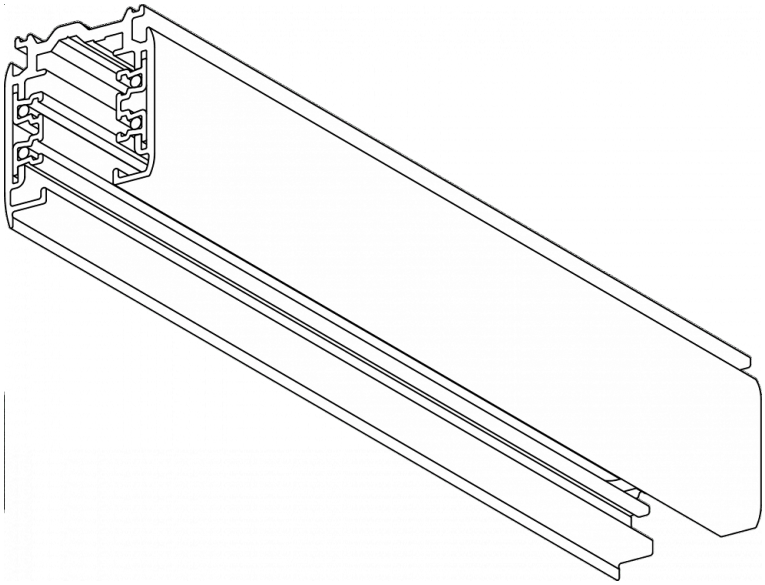

Dimensions



Available colours

White **Black** **Anodized aluminium**

Three-circuit system, rated voltage 400 V and current 16 A. Select connectors according to the earth-conductor position shown in the technical drawing. XTS21,XTS23 and XTS24 cannot be used as feeds.

Manufacturer references: XTS 4100-3 — 1000 mm, XTS 4100-2 — 1000 mm, XTS 4100-1 — 1000 mm, XTS 4200-3 — 2000 mm, XTS 4200-2 — 2000 mm, XTS 4200-1 — 2000 mm, XTS 4300-3 — 3000 mm, XTS 4300-2 — 3000 mm, XTS 4300-1 — 3000 mm, XTS 4400-3 — 4000 mm, XTS 4400-2 — 4000 mm, XTS 4400-1 — 4000 mm.

XTS PDF

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of XTS.

Mounting position	**Ceiling**	Operating voltage	**400 V**
Housing	**Aluminium**	Protection rating	**IP20**
Optic	—	Accessories	—
Control Gear	—		

Options per version

Length 1,000 - 4,000 mm | Width 31.5 mm | Height 32.5 mm

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >