
S-9000/211-S

3 variants

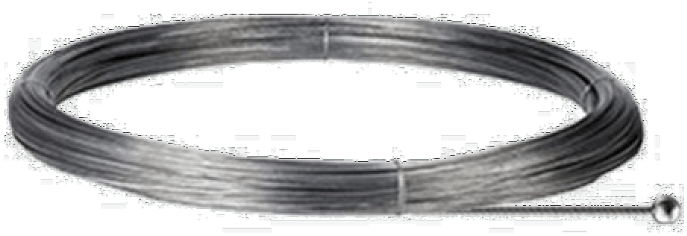

Compatible tracks: ST1, ST2. Select the exact reference according to function, installation and technical drawing. The image shows a representative version; check the selected reference in the technical document for earth orientation and configuration.

Manufacturer references: S-9000/211-S-1,5 — 1500 mm, S-9000/211-S-3 — 3000 mm, S-9000/211-S-5 — 5000 mm.

ST1 PDF ST2 PDF

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of S-9000/211-S.

Housing	—	Control Gear	—
Optic	—	Accessories	—

Options per version

Length 1,500 - 5,000 mm

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >