

TERES 2 BRASS LED

108 variants

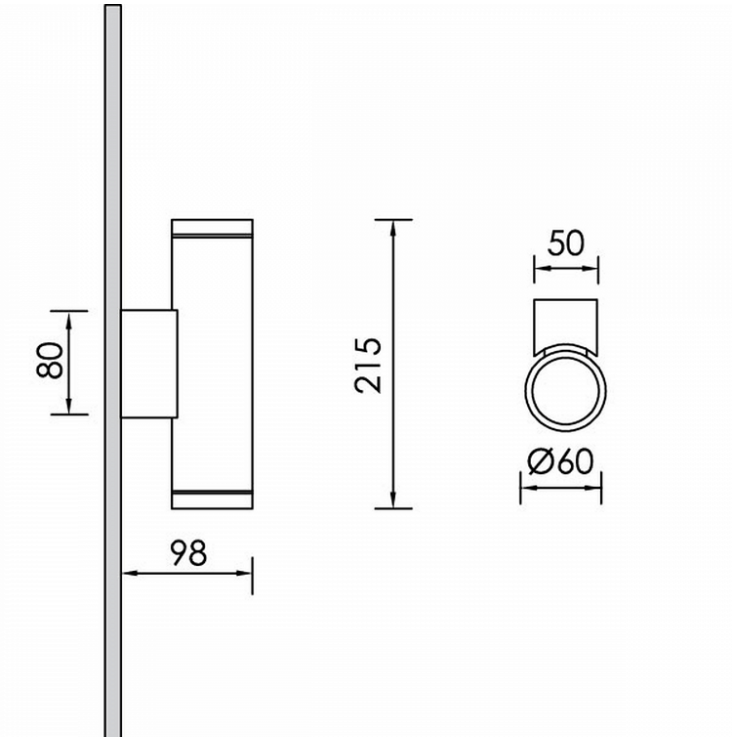

Dimensions



Available colours

White **Black** **Grey** **Anthracite** **Colourless** **Ordos 2525 Sablé**

TERES 2 BRASS LED has 3 high-power LEDs per emitting face, CRI90 and a choice of 2700, 3000 or 4000 K. It is available with 8°, 25° or 45° optics and On-Off control. Identical optics emit upwards and downwards. Wattage and luminous flux are totals for both faces.

LUMINAIRE POWER

6.7 - 9.7 W

LUMINAIRE LUMINOUS FLUX

676 - 1,056 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of TERES 2 BRASS LED.

Mounting position	**Wall Mounted**	Body dimensions	**60 × 215 × 98 mm**
Housing	**Brass**	Protection rating	**IP64 / IK07**
Optic	**Safety Glass Clear**	Lighting direction	**Upwards & downwards**
Light source	**H.P. LED**	Accessories	**MOUNTING SET**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams (NM), (UN), (W) | Control On-Off

Luminous efficacy 96.3 - 116.4 lm/W

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
927	2700 K		6.7 - 9.7	**676 - 936**
930	3000 K		6.7 - 9.7	**710 - 984**
940	4000 K		6.7 - 9.7	**782 - 1,056**

Luminous flux range per version

Minimum 676 lm / 6.7 W / 927 / WF9109CL001ON

Maximum 1,056 lm / 9.7 W / 940 / WF9124CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >