NOTUS 25 IN

360 variants

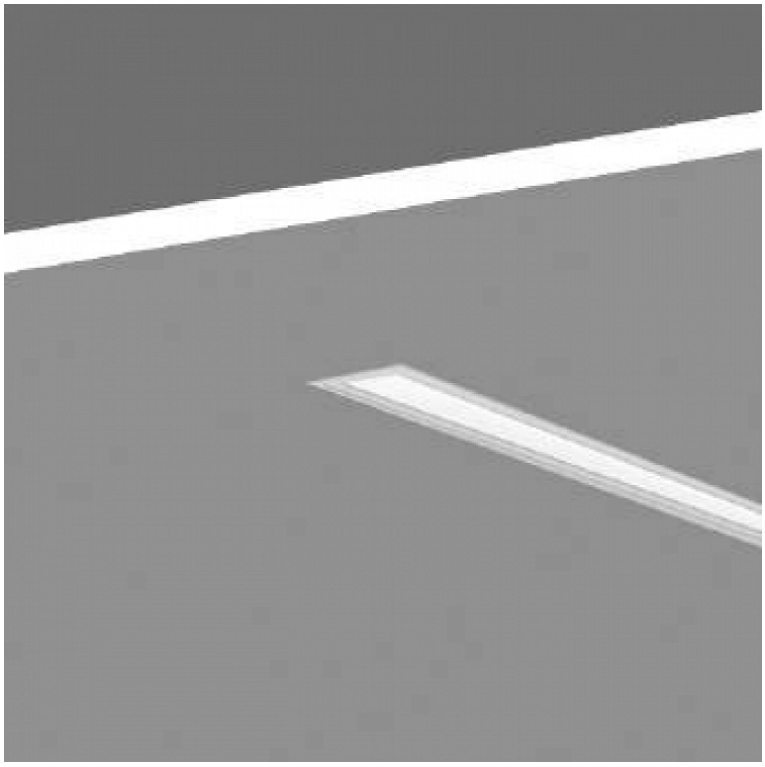

Dimensions



Available colours

White **Black**

The aluminium body is 62 mm wide including the trim and 82 mm high overall, with a 49 mm ceiling cut-out width. Available lengths range from 582 to 4,533 mm, with standard or high output (SO/HO) and 3000 or 4000 K. White and black finishes and On-Off, DALI2 or Casambi controls are available depending on the product code.

LUMINAIRE POWER

11.3 - 135.1 W

LUMINAIRE LUMINOUS FLUX

857 - 10,853 lm

The power and luminous flux ranges are calculated separately from the listed variants. For an exact combination, see the code details on the site.

See all variants on bright.gr >

Technical characteristics

Common data

Characteristics that apply to all versions of NOTUS 25 IN.

Mounting position	**Ceiling Recessed**
Housing	**Aluminium**
Optic	**PMMA**
Light source	**Linear LED**
Control Gear	**Built-in ECG**
Colour uniformity	**3 SDCM**
Ripple	**3**
Operating voltage	**230 V**

Power factor	**0.96**
Protection rating	**IP54 / IK04**
Insulation class	**Class I**
Lifetime	**>80.000h L80B10@35°C**
Operating temperature	**-10…+45°C**
Operating humidity	**5…95%**
Lighting direction	**Downwards**
Accessories	**CONVERSIONKIT+BATTERY, COVER IP54**

Markings and catalogue references **CE • LM80 • LM79 • TM21 • REACH**

Options per version

Beams 105° (VW) | Control On-Off, DALI2, DALI2 + Casambi

Luminous efficacy 75.5 - 80.4 lm/W | UGR longwise / parallel 24 - 26 / 24 - 26 | Length 582 - 4,533 mm | Width 62 mm | Height 82 mm

CRI/CCT	Colour temperature	Beams	Power (W)	Luminous flux (lm)
930	3000 K	105°	11.3 - 135.1	**857 - 10,282**
940	4000 K	105°	11.3 - 135.1	**908 - 10,853**

Luminous flux range per version

Minimum 857 lm / 11.3 W / 930 / PRR0784CL001ON

Maximum 10,853 lm / 135.1 W / 940 / PRR0843CL001ON

The ranges per CCT summarise the values of the available codes. To choose a specific code, open the full table of variants.

See all variants on bright.gr >