
FAMA L OUT

ΑΠΡ 2025


οδηγίες τοποθέτησης


εξωτερικού χώρου / projectors

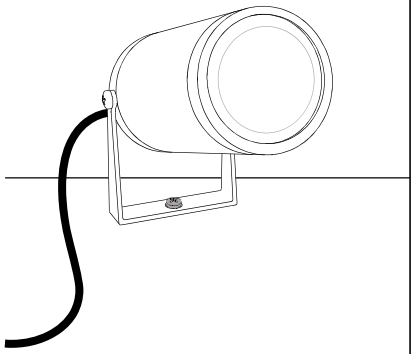

Περιστροφή : Κάθετα 90°

1 **Εγκατάσταση**
Κάντε την τρύπα και βιδώστε το φωτιστικό στην επιφάνεια τοποθέτησης.




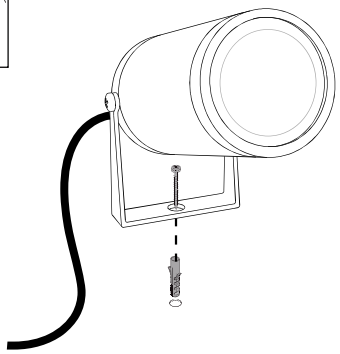


ΠΑΡΟΧΗ
~220 - 240V

Κάντε στεγανή σύνδεση.


Εργαλεία



2




3 Προσαρμόστε το φωτιστικό για να εστιάσετε.

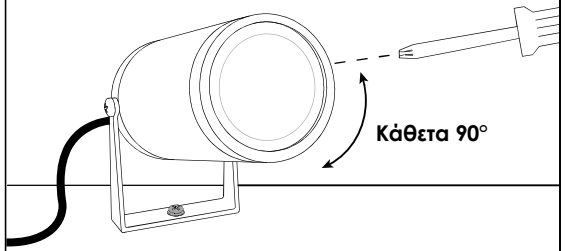

4 **Αντικατάσταση λαμπτήρα**
Ξεβιδώστε και αφαιρέστε το καπάκι του φωτιστικού.




5 Αφαιρέστε το ελατήριο συγκράτησης.

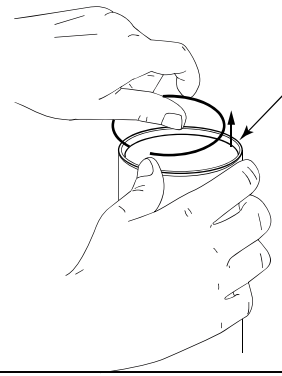

Προσοχή!
Μην αφαιρείται το λάστιχο στεγανοποίησης

6 Τοποθετήστε το λαμπτήρα και το ελατήριο συγκράτησης. Βιδώστε το καπάκι χωρίς να αφαιρέσετε το λάστιχο στεγανοποίησης.

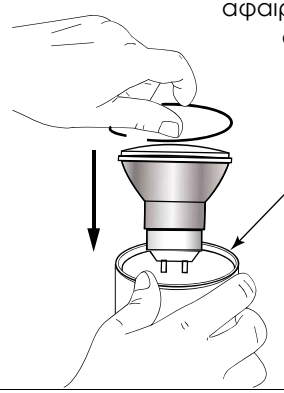

Προσοχή!
Μην αφαιρείται το λάστιχο στεγανοποίησης

Οδηγίες εγκατάστασης

- Η εγκατάσταση του φωτιστικού σώματος πρέπει να γίνει από αδειούχο ηλεκτρολόγο εγκαταστάτη ή τεχνικό με γνώση του ισχύοντος κανονισμού εσωτερικών ηλεκτρικών εγκαταστάσεων.
- Εφόσον το φωτιστικό είναι εφοδιασμένο με ακροδέκτη γειώσεως, να γίνει σύνδεση με την γείωση της εγκατάστασης.
- Κατά την αλλαγή του λαμπτήρα ή κατά τον καθαρισμό του φωτιστικού πρέπει να λαμβάνεται μέριμνα ώστε το φωτιστικό να μην είναι υπό τάση.
- Η ισχύς των λαμπτήρων δεν πρέπει να είναι μεγαλύτερη της αναγραφόμενης στην πινακίδα του φωτιστικού ή στην ετικέτα της συσκευασίας.
- Μετά την τοποθέτηση βεβαιωθείτε ότι το φωτιστικό είναι επαρκώς στερεωμένο και οι στυπιοθλίπτες των καλωδίων, όπου υπάρχουν, είναι σφιγμένοι μέχρι το τέλος της διαδρομής τους.
- Ο κατασκευαστής δεν φέρει καμία ευθύνη για τραυματισμούς ή βλάβες που προέρχονται από λανθασμένη τοποθέτηση ή χρήση.
- Δεν προορίζεται για βρογχοειδή σύνδεση.
- Βίδες, ούπα και κλέμες δεν συμπεριλαμβάνονται στο φωτιστικό.
- Τα στοιχεία LED αντικαθίστανται μόνο από τον κατασκευαστή.

ΠΡΟΣΟΧΗ
Μην αγγίζετε τα LED συστήματα χωρίς τα αντι-στατικά γάντια



BRIGHT
ΕΙΔΙΚΟΣ ΦΩΤΙΣΜΟΣ

Εργοστάσιο
Κεφαλοβρύσου 5, Μονομάτι, Αχαρνές, Τ.Κ. 13677, Αθήνα, Ελλάδα
Τηλ: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP64


GREENLIGHT

FAMA L OUT

APR 2025

installation instructions


outdoor / projectors

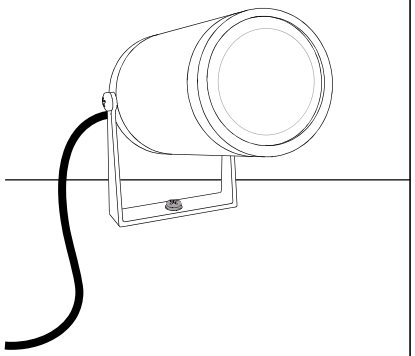


Rotation: Vertical 90°

1 **Installation**


Drill the mounting hole and screw the luminaire onto the mounting surface.



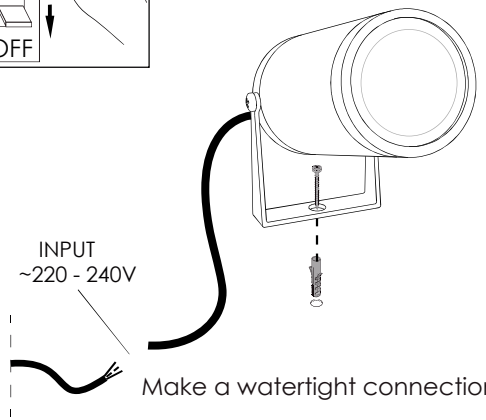


Make a watertight connection.


Tool



2



3 Adjust the luminaire to focus.

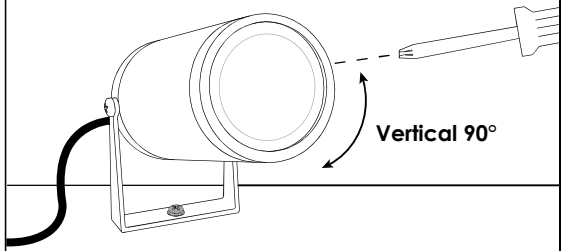


4 **Lamp replacement**

Unscrew and remove the luminaire cover.




5 Remove the retaining spring.

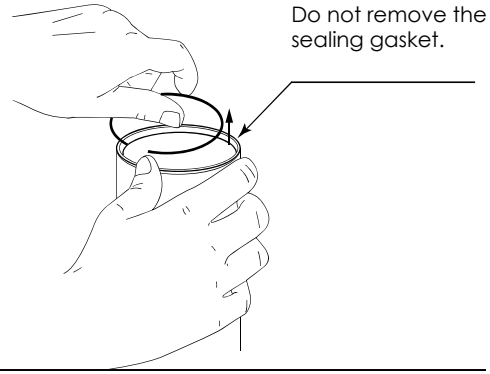

Caution!
Do not remove the sealing gasket.

6 Insert the lamp and retaining spring. Screw on the cover without removing the sealing gasket.

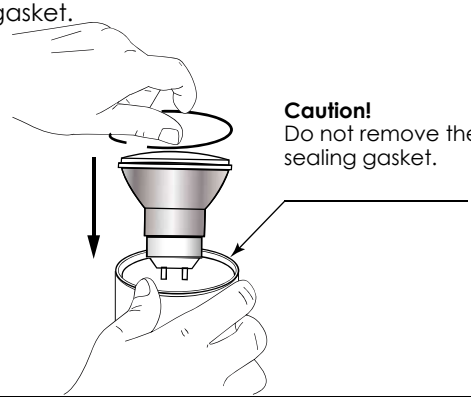

Caution!
Do not remove the sealing gasket.

USER INSTRUCTIONS

- Installation must be carried out by a licensed electrician or technician familiar with the applicable electrical installation regulations.
- If an earth terminal is provided, connect it to the installation earth.
- Switch off the mains before replacing lamps or cleaning the luminaire.
- Do not exceed the lamp wattage shown on the luminaire label or packaging.
- After installation, check that the luminaire is securely fixed and that any cable glands are fully tightened.
- The manufacturer accepts no liability for injury or damage caused by incorrect installation or use.
- Not intended for loop connection.
- Screws, wall plugs and terminals are not included.
- LED modules may only be replaced by the manufacturer.

CAUTION
Wear anti-static gloves before touching LED systems.



BRIGHT SPECIAL LIGHTING

Factory
5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece Tel: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP64

GREENLIGHT