
FUSUS M TRIM S.S.LED

ΔΕΚ 2025

οδηγίες τοποθέτησης


⊖ εσωτερικού χώρου / χωνευτά σποτ

1




Εγκατάσταση


Ανοίξτε οπή στην οροφή.




Περιστρέψτε και απασφαλίστε το εσωτερικό μέρος του φωτιστικού.




Μετρήστε το πάχος της ψευδοροφής και ρυθμίστε τα ελάσματα. Σφίξτε τις βίδες.







2 Τοποθετήστε το πλαίσιο στην οροφή.




3 Στερεώστε το πλαίσιο με δύο (2) βίδες. Κρατάτε το σώμα όσο χρησιμοποιείτε το δράπανο.




Εργαλεία / εξαρτήματα




4 Μετά την τοποθέτηση γεμίστε τα κενά της οροφής με κατάλληλο υλικό.

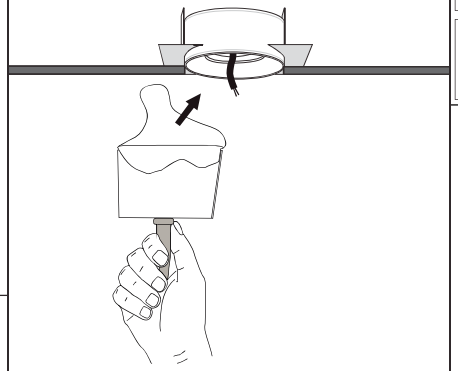


5 Έπειτα βάψτε την οροφή.

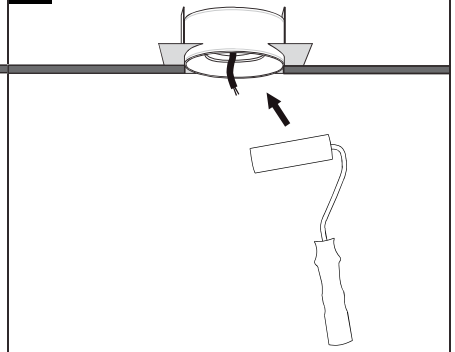

6



Κάντε την ηλεκτρική σύνδεση. Τοποθετήστε το εσωτερικό μέρος και περιστρέψτε μέχρι να ασφαλίσει ο εσωτερικός δακτύλιος.

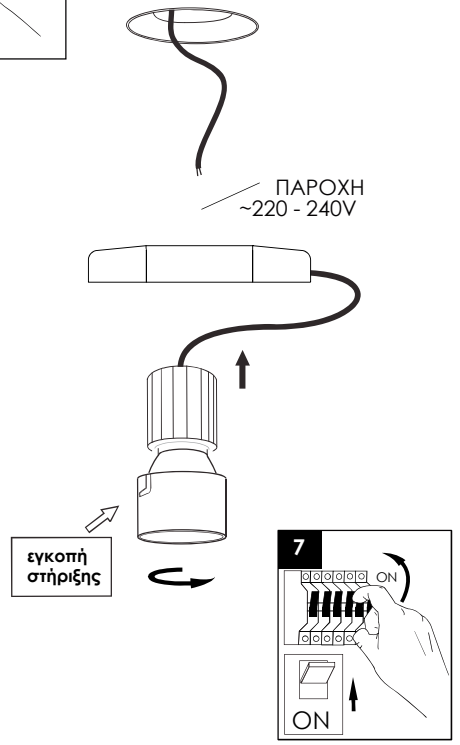

ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ

- Η εγκατάσταση πρέπει να γίνεται από αδειούχο ηλεκτρολόγο.
- Εφόσον υπάρχει ακροδέκτης γείωσης, συνδέστε τον στη γείωση της εγκατάστασης.
- Βεβαιωθείτε ότι η παροχή είναι απενεργοποιημένη κατά τη συντήρηση.
- Η ισχύς των λαμπτήρων δεν πρέπει να υπερβαίνει την ένδειξη στο φωτιστικό ή στη συσκευασία.
- Μετά την εγκατάσταση ελέγξτε τη στερέωση και τη σύσφιξη των στυπιοθλιπτών, όπου υπάρχουν.
- Ο κατασκευαστής δεν ευθύνεται για τραυματισμούς ή ζημιές από λανθασμένη εγκατάσταση ή χρήση.
- Δεν προορίζεται για βρογχοειδή σύνδεση.
- Τα ούπα και οι κλέμες δεν περιλαμβάνονται.
- Τα στοιχεία LED αντικαθίστανται μόνο από τον κατασκευαστή.

ΠΡΟΣΟΧΗ

Φοράτε αντιστατικά γάντια όταν αγγίζετε τα LED.



BRIGHT ΕΙΔΙΚΟΣ ΦΩΤΙΣΜΟΣ

Εργοστάσιο

Κεφαλοβρύσου 5, Μονομάτι, Αχαρνές, Τ.Κ. 13677, Αθήνα, Ελλάδα Τηλ: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP20
IP44

GREENLIGHT


FUSUS M TRIM S.S.LED

DEC 2025

installation instructions


indoor / downlights / recessed spots

1




Installation


Cut hole on ceiling




Rotate and unlock the inner part of the luminaire.




Measure the false ceiling thickness and fit the metal strips on the fixture. Tighten the screws.







2 Place the fitting in the ceiling.




3 Secure the fitting on ceiling with two (2) screws. Hold the fixture body while you use the drill.




Tool accessories




4 After installing the fitting you will need filling material to fill the gaps on ceiling.

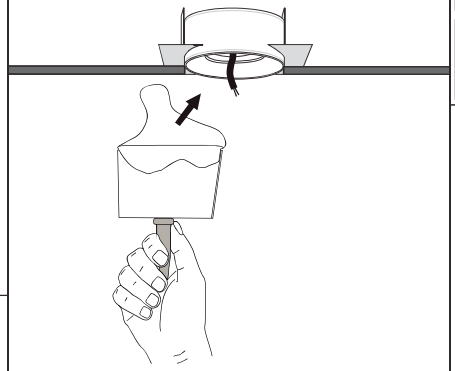


5 Then paint the ceiling.

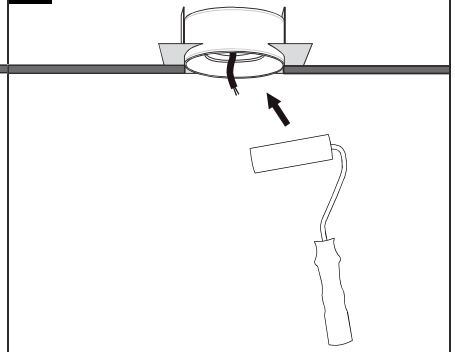


6



Make wiring connection.
Fit the inner part in the fixture and rotate untill the inner ring locks into place.

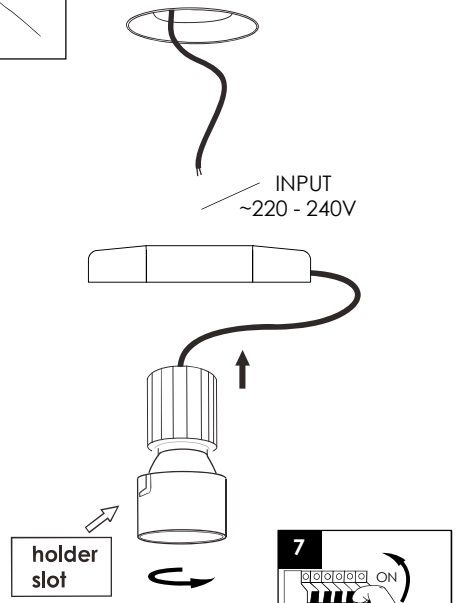

7



USER INSTRUCTIONS

- The installation of the unit must be done by a qualified electrician.
- The unit must be earthed in case an earth connecting point exists.
- Ensure that the mains is switched off during servicing.
- Do not use bulb(s) bigger than the indicated on units name-plate or packaging.
- Ensure that after the installation, the unit is properly fixed and the cable clamps (if exist) are well tightened.
- Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation.
- The unit is not intended to operate in loop connection.
- Wall plugs and terminals are not included.
- LED modules are replaced only by the manufacturer.

CAUTION

Wear anti-static gloves
before you touch LED systems



BRIGHT SPECIAL LIGHTING

Factory
5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece
Tel: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP20
IP44

GREENLIGHT