ΔΕΚ 2025

FUSUS S TRIM S.S.LED

οδηγίες τοποθέτησης


εσωτερικού χώρου / χωνευτό οροφής






1


Βάθος | **DAli Driver** 200mm | **ON/OFF Driver** 170mm




Εγκατάσταση


Κόψτε τη γυψοσανίδα.






Προσαρμόστε τα λαμάκια στήριξης (x2) ανάλογα με το πάχος της γυψοσανίδας και σφίξτε τις βίδες.







2 Τοποθετήστε το εξωτερικό σώμα του φωτιστικού στην οροφή βάζοντας πρώτα τη μία πλευρά μέσα.




3 Στερεώστε το φωτιστικό σώμα με δύο (2) βίδες στην οροφή. Κρατήστε το για αντίσταση όσο το βιδώνετε.

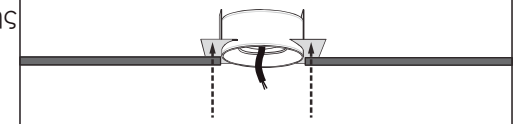


Εργαλεία




4 Απλώστε στόκο για να γεμίσετε τα κενά στις ενώσεις με την οροφή.

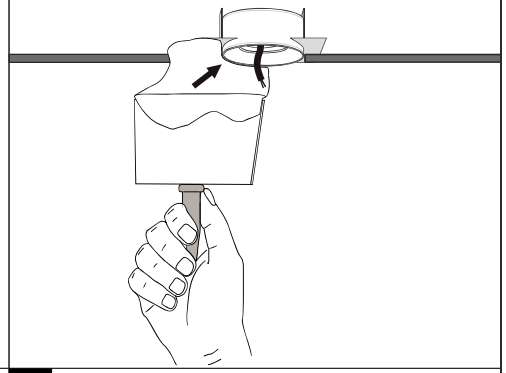

5 Μετά, βάψτε την οροφή.

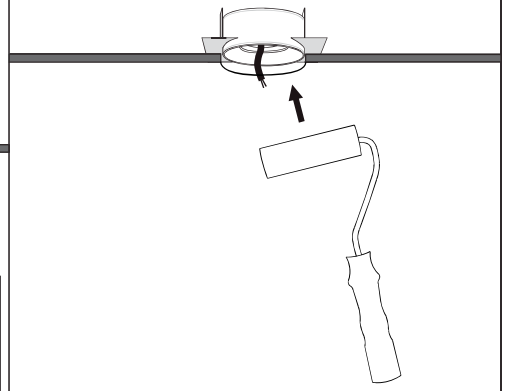


6 Κάντε τις συνδέσεις.

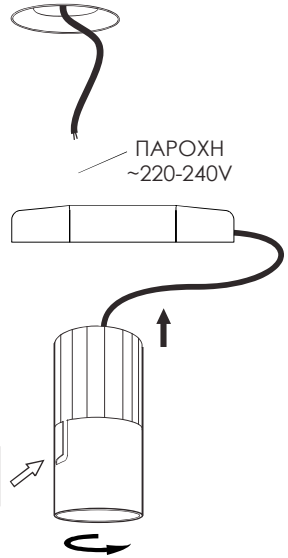

Τοποθετήστε το εσωτερικό σώμα στρέφοντάς το μέχρι να κουμπώσει σωστά.

7



Οδηγίες εγκατάστασης

- Η εγκατάσταση του φωτιστικού σώματος πρέπει να γίνει από αδειούχο ηλεκτρολόγο εγκαταστάτη ή τεχνικό με γνώση του ισχύοντος κανονισμού εσωτερικών ηλεκτρικών εγκαταστάσεων.
- Εφόσον το φωτιστικό είναι εφοδιασμένο με ακροδέκτη γειώσεως, να γίνει σύνδεση με την γείωση της εγκατάστασης.
- Κατά την αλλαγή του λαμπτήρα ή κατά τον καθαρισμό του φωτιστικού πρέπει να λαμβάνεται μέριμνα ώστε το φωτιστικό να μην είναι υπό τάση.
- Η ισχύς των λαμπτήρων δεν πρέπει να είναι μεγαλύτερη της αναγραφόμενης στην πινακίδα του φωτιστικού ή στην ετικέτα της συσκευασίας.
- Μετά την τοποθέτηση βεβαιωθείτε ότι το φωτιστικό είναι επαρκώς στερεωμένο και οι στυπιοθλίπτες των καλωδίων, όπου υπάρχουν, είναι σφιγμένοι μέχρι το τέλος της διαδρομής τους.
- Ο κατασκευαστής δεν φέρει καμία ευθύνη για τραυματισμούς ή βλάβες που προέρχονται από λανθασμένη τοποθέτηση ή χρήση.
- Δεν προορίζεται για βρογχοειδή σύνδεση.
- Βίδες, ούπα και κλέμες δεν συμπεριλαμβάνονται στο φωτιστικό.
- Τα στοιχεία LED αντικαθίστανται μόνο από τον κατασκευαστή.

ΠΡΟΣΟΧΗ

Μην αγγίζετε τα LED συστήματα χωρίς τα αντι-στατικά γάντια



BRIGHT ΕΙΔΙΚΟΣ ΦΩΤΙΣΜΟΣ

Εργοστάσιο
Κεφαλοβρύσου 5, Μονομάτι, Αχαρνές, Τ.Κ. 13677, Αθήνα, Ελλάδα
Τηλ: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP20
IP44


GREENLIGHT

FUSUS S TRIM S.S.LED

DEC 2025


installation instructions


indoor / downlights / recessed spots



1


Depth | **DALI Driver** 200mm | **ON/OFF Driver** 170mm







Installation

Cut hole on ceiling.




Adjust the metal strips on the fixture to fit to the false ceiling and tighten the screws.

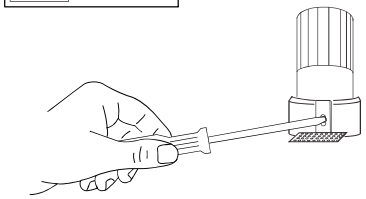





2 Place the fitting in the ceiling.




3 Secure the fitting on ceiling with two (2) screws. Hold the fixture while using the drill.

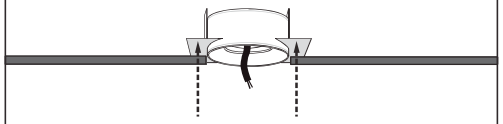


Tool accessories




4 After installing the fitting, fill the gaps on ceiling.

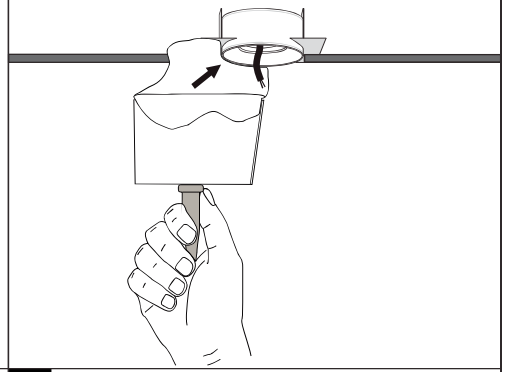

5 Then, paint the ceiling.

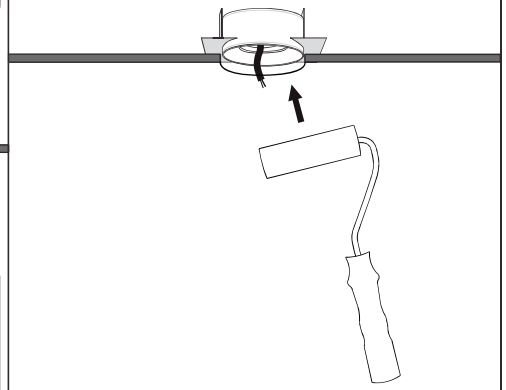


6 Make wiring connections.

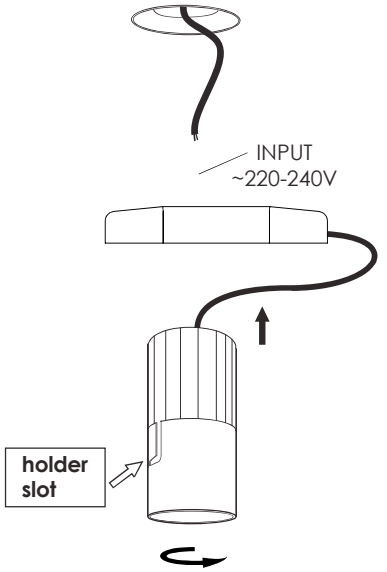

Fit the inner part in the fixture and rotate untill the inner ring locks into place.

7



USER INSTRUCTIONS

- The installation of the unit must be done by a qualified electrician.
- The unit must be earthed in case an earth connecting point exists.
- Ensure that the mains is switched off during servicing.
- Do not use bulb(s) bigger than the indicated on units name-plate or packaging.
- Ensure that after the installation, the unit is properly fixed and the cable clamps (if exist) are well tightened.
- Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation.
- The unit is not intended to operate in loop connection.
- Wall plugs and terminals are not included.
- LED modules are replaced only by the manufacturer.

CAUTION

Wear anti-static gloves before you touch LED systems



BRIGHT SPECIAL LIGHTING

Factory
5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece
Tel: (+30) 210 6208 230 | E-mail: info@bright.gr | www.bright.gr

IP20
IP44

GREENLIGHT