
STATUS 2F SSLED

JAN 2020


installation instructions

εσωτερικού χώρου/downlight recessed spots

1





Εγκατάσταση

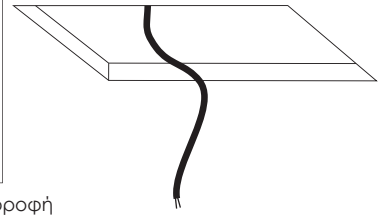


a. Κόψτε τρύπα στην οροφή

b. Περάστε το καλώδιο μέσα από την τρύπα της βάσης



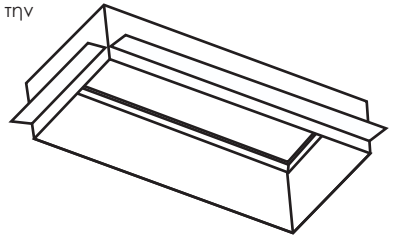



2

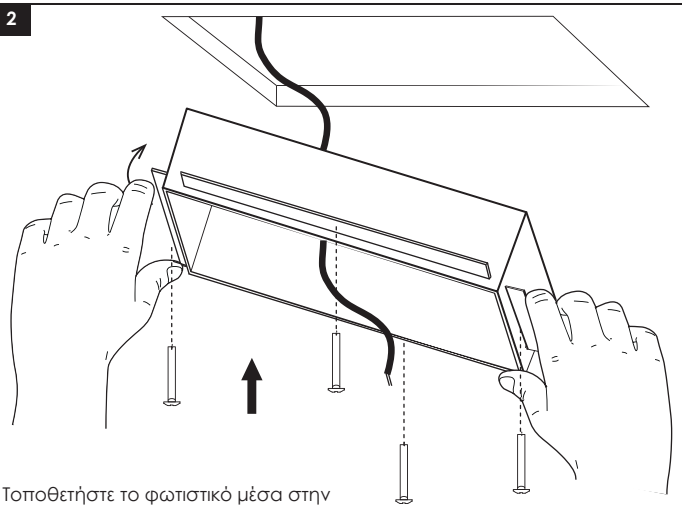


Τοποθετήστε το φωτιστικό μέσα στην οροφή, πρώτα βάζοντας τη μία πλευρά.

3 Βιδώστε το φωτιστικό στην οροφή κρατώντας αντίσταση με το φωτιστικό.

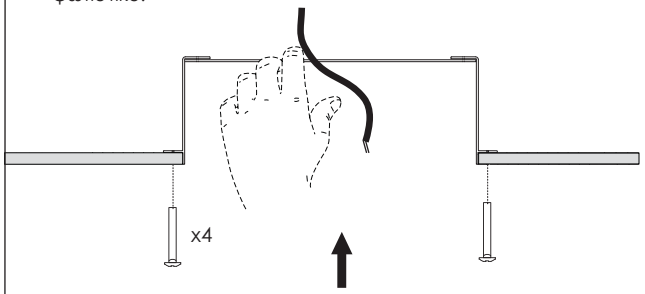




4

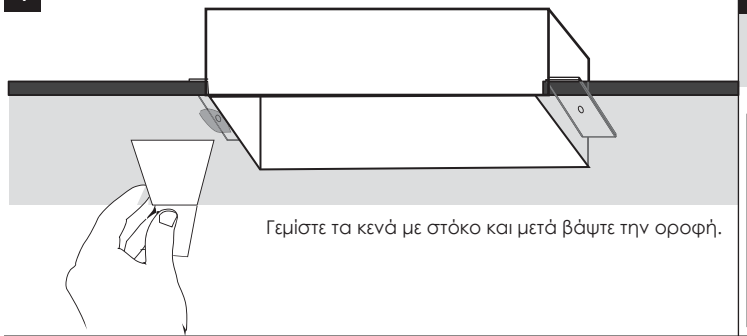


Γεμίστε τα κενά με στόκο και μετά βάψτε την οροφή.

5

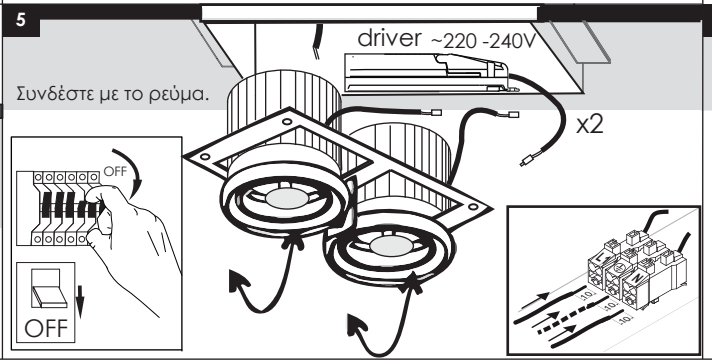

6

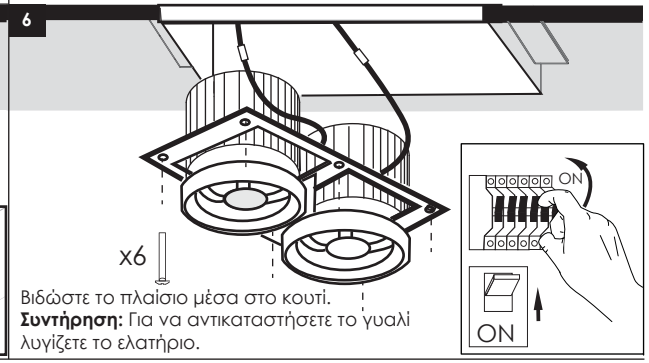


Βιδώστε το πλαίσιο μέσα στο κουτί.
Συντήρηση: Για να αντικαταστήσετε το γυαλί λυγίζετε το ελατήριο.

Οδηγίες εγκατάστασης

- Η εγκατάσταση του φωτιστικού σώματος πρέπει να γίνει από αδειούχο ηλεκτρολόγο εγκαταστάτη ή τεχνικό με γνώση του ισχύοντος κανονισμού εσωτερικών ηλεκτρικών εγκαταστάσεων.
- Εφόσον το φωτιστικό είναι εφοδιασμένο με ακροδέκτη γειώσεως, να γίνει σύνδεση με την γείωση της εγκατάστασης.
- Κατά την αλλαγή του λαμπτήρα ή κατά τον καθαρισμό του φωτιστικού πρέπει να λαμβάνεται μέριμνα ώστε το φωτιστικό να μην είναι υπό τάση.
- Η ισχύς των λαμπτήρων δεν πρέπει να είναι μεγαλύτερη της αναγραφόμενης στην πινακίδα του φωτιστικού ή στην ετικέτα της συσκευασίας.
- Μετά την τοποθέτηση βεβαιωθείτε ότι το φωτιστικό είναι επαρκώς στερεωμένο και οι στυπιοθλίπτες των καλωδίων, όπου υπάρχουν, είναι σφιγμένοι μέχρι το τέλος της διαδρομής τους.
- Ο κατασκευαστής δεν φέρει καμία ευθύνη για τραυματισμούς ή βλάβες που προέρχονται από λανθασμένη τοποθέτηση ή χρήση.
- Δεν προορίζεται για βρογχοειδή σύνδεση.
- Βίδες, ούπα και κλέμες δεν συμπεριλαμβάνονται στο φωτιστικό
- Τα στοιχεία LED αντικαθίστανται μόνο από τον κατασκευαστή.

ΠΡΟΣΟΧΗ

μην αγγίζετε τα LED συστήματα χωρίς τα αντι-στατικά γάντια



ΠΡΟΣΟΧΗ

Αντικαταστήστε άμεσα τυχόν ραγισμένο γυαλί



BRIGHT SPECIAL LIGHTING

Factory
5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece | Tel: (+30) 210 6208 230
E-mail: info@bright.gr | www.bright.gr

GREENLIGHT


STATUS 2F SSLED

JAN 2020


installation instructions

indoor/downlight recessed spots


1




Installation

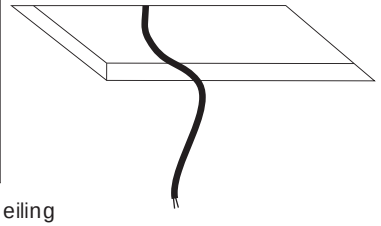


a. Cut the hole on ceiling
b. Pass cable through the fixture

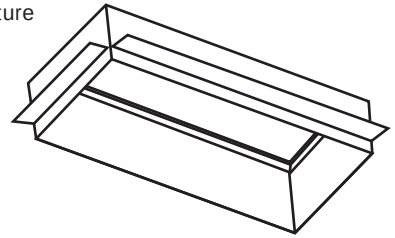





2

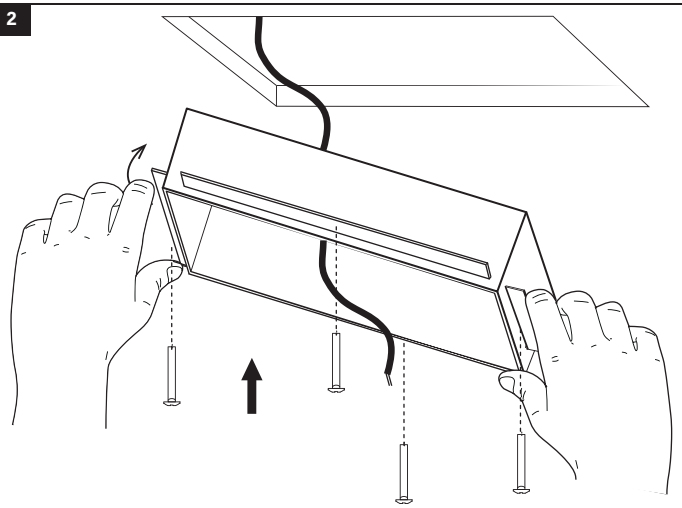


Fit luminaire on false ceiling. Fit first the one side

3 Secure the fitting on ceiling with screws. Provide enough resistance with your hand.

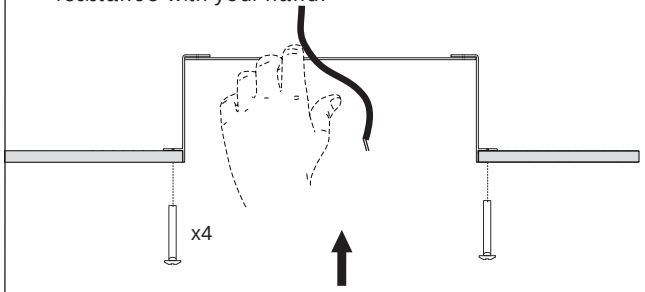




4

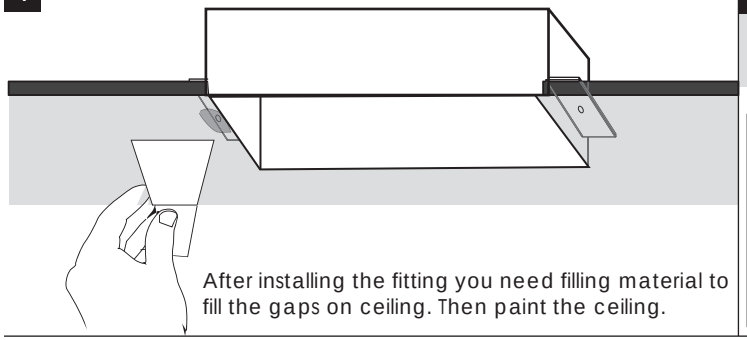


After installing the fitting you need filling material to fill the gaps on ceiling. Then paint the ceiling.

5

Make wiring connections.

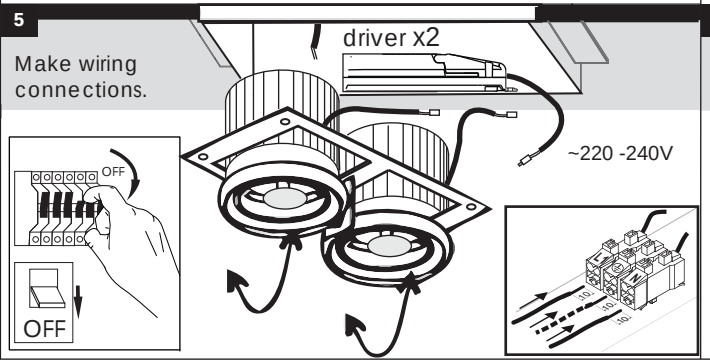

6

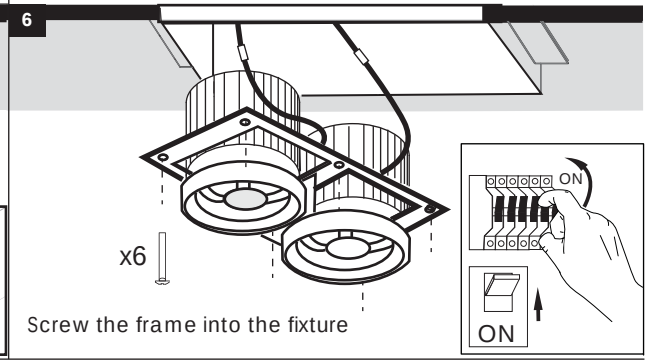


Screw the frame into the fixture

USER INSTRUCTIONS

- The installation of the unit must be done by a qualified electrician.
- The unit must be earthed in case an earth connecting point exists.
- Ensure that the mains is switched off during servicing.
- Do not use bulb(s) bigger than the indicated on units name-plate or packaging.
- Ensure that after the installation, the unit is properly fixed and the cable clamps (if exist) are well tightened.
- Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation
- The unit is not intended to operate in loop connection.
- Wall plugs and terminals are not included.
- LED modules are replaced only by the manufacturer.

CAUTION

Wear anti-static gloves
before you touch LED systems



CAUTION

Replace any cracked shield



BRIGHT SPECIAL LIGHTING

Factory
5 Kefalovrisou Str., Monomati, Acharnai, P.O. Box 13677, Athens, Greece | Tel: (+30) 210 6208 230
E-mail: info@bright.gr | www.bright.gr

GREENLIGHT