
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOTUS 14 UP DOWN SP



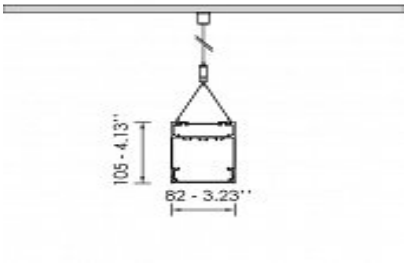

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1403CL001DAC
Product family	NOTUS
Diffuser	PMMA
Control Gear	Built-in ECG
Width	82
Length	596
Height	105


Electrical data


Consumption	22,7
Performance	90.86
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	1999
CRI CCT	930

Light distribution







Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%