
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS 5 II SP



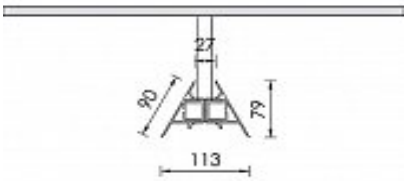

CE LM80 LM79 TM21 REACH CE LM8

TM21 REACH Source Type Linear LED

Product Details

General Information

Housing	Aluminium
Product code	PRS1917CL002DAC
Product family	COMIS
Diffuser	
Control Gear	Built-in ECG
Width	113
Length	1000
Height	79


Electrical data

Consumption	19,2
Performance	55
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	1056
CRI CCT	930
Glare Indicator Ugr Longwise Optics	12
Glare Indicator Ugr Parallel Optics	13

Light distribution

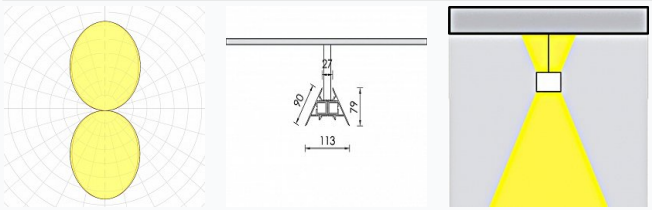

Safety characteristics

IK	05
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%