
COMIS 35 UP DOWN



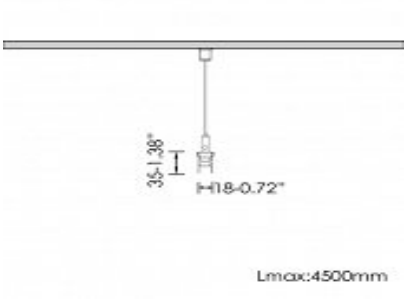

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1922CL003DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	18
Length	1000
Height	35


Electrical data

Consumption	14,4
Performance	128.43
Ripple	3
Power Factor	0.96
Nominal Voltage	24


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	1798
CRI CCT	930
Glare Indicator Ugr Longwise Optics	15
Glare Indicator Ugr Parallel Optics	17

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%