
# COMIS 40 FLEX



## Technical drawings

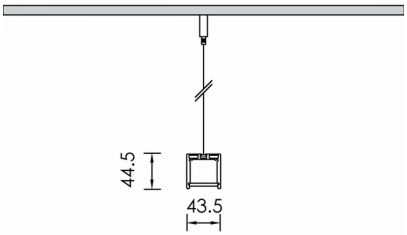


## Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRS1931CL002DA |
| Product family | COMIS |
| Diffuser | Silicone |
| Control Gear | Remote Electronic Driver |
| Width | 43.5 mm |
| Length | 1000 mm |
| Height | 44.5 mm |


### Electrical data

| | |
|---|---|
| Consumption | 10 W |
| Performance | 75.6 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 24 V |

### Luminaire Output

| | |
|---|---|
| Luminous Flux | 756 lm |
| CRI CCT | 940 |

### Light distribution



### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 40 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L70B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |