
COMIS 40 FLEX



Technical drawings

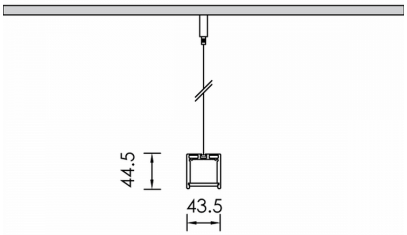

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1932CL001ON
Product family	COMIS
Diffuser	Silicone
Control Gear	Remote Electronic Driver
Width	43.5 mm
Length	1000 mm
Height	44.5 mm


Electrical data

Consumption	20 W
Performance	75.65 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	24 V

Luminaire Output

Luminous Flux	1513 lm
CRI CCT	940

Light distribution



Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%