
COMIS RING OUT



Technical drawings

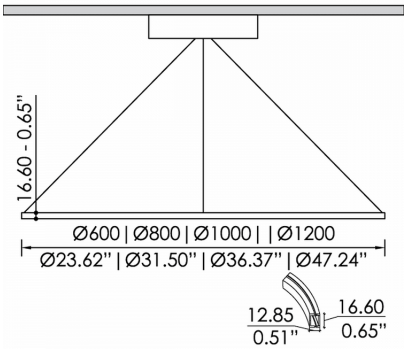

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1939CL003DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	12.85 mm
Length	1000 mm
Height	16.6 mm


Electrical data

Consumption	37 W
Performance	75.13 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	2775 lm
CRI CCT	940

Light distribution

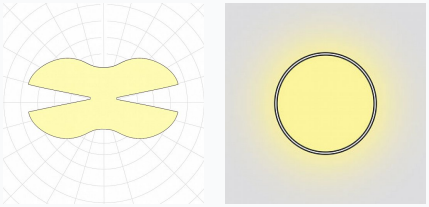

Safety characteristics

IK	05
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%