
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS 10 RING



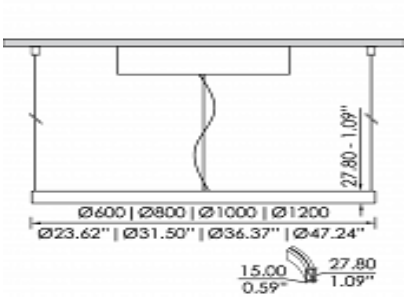

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1947CL003DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	15
Length	1000
Height	27.8


Electrical data


Consumption	31
Performance	80
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Luminous Flux	2480
CRI CCT	940

Light distribution





Safety characteristics

IK	05
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%