
NOVUS OUT OPAL TAPE LED SP



Technical drawings

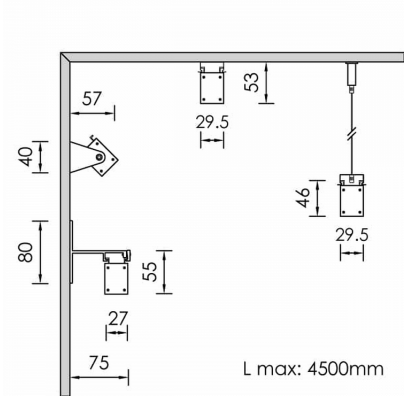

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRS1970CL001DA
Product family	NOVUS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	27 mm
Length	100 mm
Height	55 mm


Electrical data

Consumption	1,5 W
Performance	106 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	24 V

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	106 lm
CRI CCT	940
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	29

Light distribution

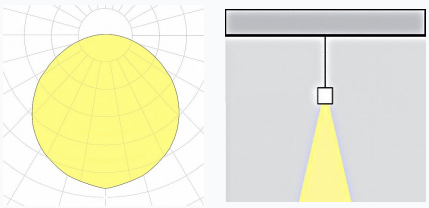

Safety characteristics

IK	10
IP	68
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%