
NINIO S SP



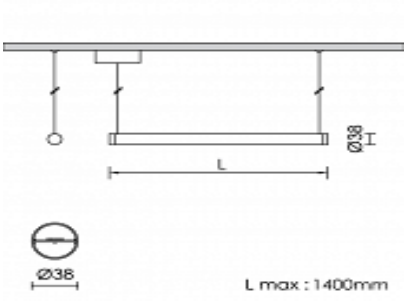

CE LM80 LM79 TM21 REACH CE LM8

TM21 REACH Source Type Linear LED

Product Details

General Information

Housing	Polycarbonate
Product code	PRS1976CL001DAC
Product family	NINIO
Diffuser	Opal Polycarbonate
Control Gear	Remote Electronic Driver
Width	38
Length	1000
Height	38


Electrical data

Consumption	17,5
Performance	86.43
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	1512.5
CRI CCT	930
Glare Indicator Ugr Longwise Optics	26
Glare Indicator Ugr Parallel Optics	27

Light distribution

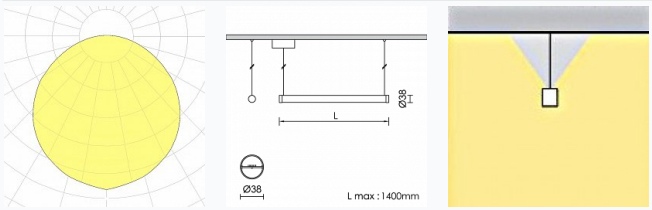

Safety characteristics

IK	06
IP	54
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%