
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VIVO 5



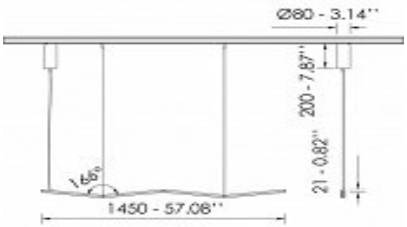

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information


Housing	Aluminium
Product code	PRS1979CL002DAC
Product family	VIVO
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	21
Length	1450
Height	64


Electrical data

Consumption	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Light distribution





Safety characteristics

IK	05
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%