
FUGA 2 RING



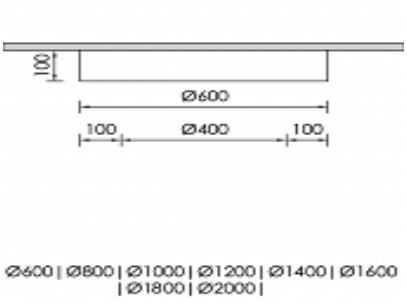

Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC0049CL002DAC
Product family	FUGA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	100
Diameter	1400


Electrical data


Consumption	124,4
Performance	86.27
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output


Beam Type	VW
Beam	110º
Luminous Flux	10698
CRI CCT	930
Glare Indicator Ugr Longwise Optics	19
Glare Indicator Ugr Parallel Optics	19

Light distribution





Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |



Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%