
FUGA 2 RING



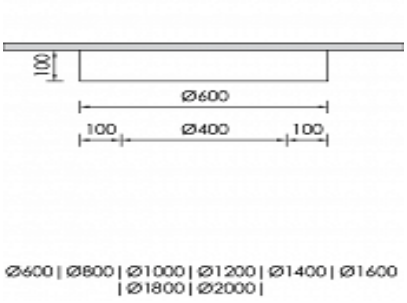

Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC0055CL003DAC
Product family	FUGA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	100
Diameter	1000


Electrical data


Consumption	88,8
Performance	96.88
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output


Beam Type	VW
Beam	110º
Luminous Flux	8525
CRI CCT	940
Glare Indicator Ugr Longwise Optics	21
Glare Indicator Ugr Parallel Optics	21

Light distribution





Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |



Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%