
# FUGA 2 RING



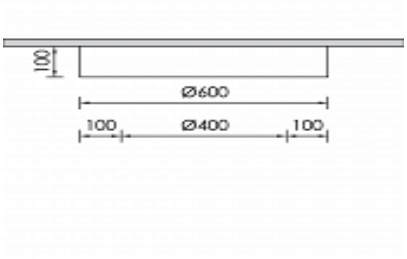


Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |

## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRC0057CL003DAC |
| Product family | FUGA |
| Diffuser | PMMA |
| Control Gear | Built-in ECG |
| Height | 100 |
| Diameter | 1400 |


### Electrical data


| | |
|---|---|
| Consumption | 124,4 |
| Performance | 96.31 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 |

### Luminaire Output


| | |
|---|---|
| Beam Type | VW |
| Beam | 110º |
| Luminous Flux | 11942 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 20 |
| Glare Indicator Ugr Parallel Optics | 20 |

### Light distribution






Ø600 | Ø800 | Ø1000 | Ø1200 | Ø1400 | Ø1600 | Ø1800 | Ø2000 |



### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 40 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >80.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |