
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOTUS 5 SQUARE



Technical drawings



L: 600x600mm - 23.62''x23.62''
900x900mm - 35.43''x35.43''
1200x1200mm - 47.24''x47.24''
1500x1500mm - 59.05''x59.05''

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC1040CL001DAC
Product family	NOTUS
Diffuser	PMMA
Control Gear	Built-in ECG
Width	2015 mm
Length	2015 mm
Height	87 mm


Electrical data

Consumption	236,4 W
Performance	92.45 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	VW
Beam	104º
Luminous Flux	21276 lm
CRI CCT	930

Light distribution

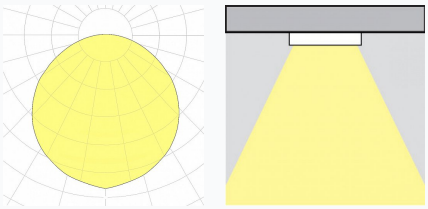

Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%