
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS OUT SMALL OPAL



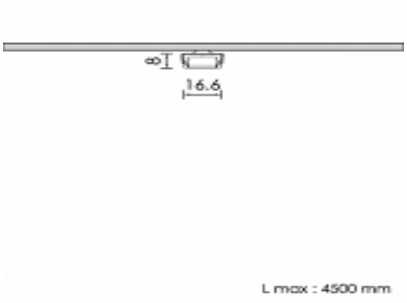

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRC1510CL003DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	16.6
Length	100
Height	8


Electrical data

Consumption	1,5
Performance	70.33
Ripple	3
Power Factor	0.96
Nominal Voltage	24


Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	105.5
CRI CCT	940
Glare Indicator Ugr Longwise Optics	29
Glare Indicator Ugr Parallel Optics	30

Light distribution







Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%