
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# COMIS OUT LENS TAPE



## Technical drawings

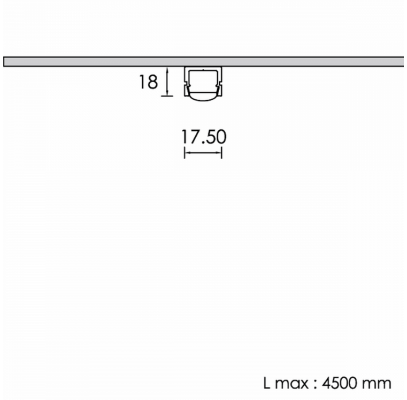


## Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRC1518CL003DAC |
| Product family | COMIS |
| Diffuser | Polycarbonate |
| Control Gear | Remote Electronic Driver |
| Options for Dimming Control | DALI2 |
| Options for Wireless Dimming | Casambi |
| Width | 17.5 mm |
| Length | 500 mm |
| Height | 18 mm |


### Electrical data

| | |
|---|---|
| Consumption | 7,2 W |
| Performance | 95 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 24 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 119º |
| Luminous Flux | 684 lm |
| CRI CCT | 930 |
| Glare Indicator Ugr Longwise Optics | 23 |
| Glare Indicator Ugr Parallel Optics | 27 |

### Light distribution

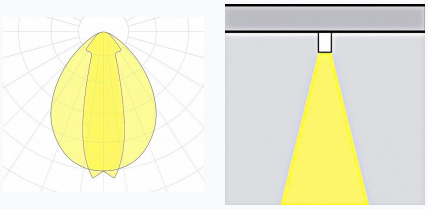

### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 40 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L70B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |