
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOVUS OUT CHANNEL H.P.LED



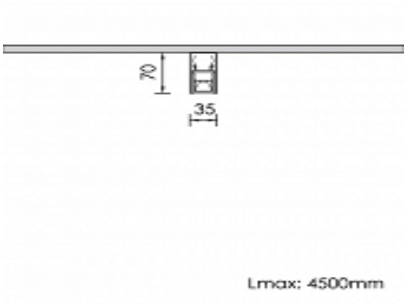

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information


Housing	Aluminium
Product code	PRC1539CL001DA
Product family	NOVUS
Diffuser	
Control Gear	Remote Electronic Driver
Width	35
Length	1000
Height	70


Electrical data

Consumption	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Light distribution





Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%