
# NOVUS OUT CHANNEL SPOT H.P.LED



## Technical drawings

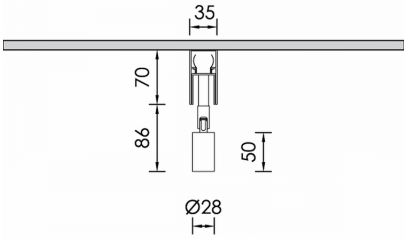


Lmax: 4500mm

## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information


| | |
|---|---|
| Housing | Aluminium |
| Product code | PRC1540CL003DAC |
| Product family | NOVUS |
| Diffuser | |
| Control Gear | Remote Electronic Driver |
| Width | 35 mm |
| Length | |
| Height | 70 mm |

### Electrical data

| | |
|---|---|
| Consumption | 3 W |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

### Light distribution



### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 40 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |