
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS IN OPAL



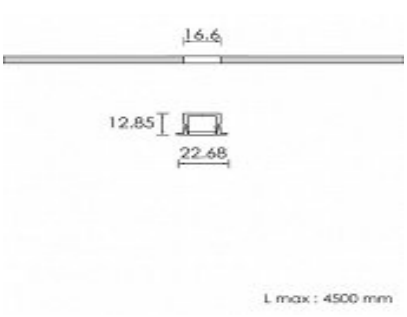

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	PRR0543CL003DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	22.68
Length	100
Height	12.85


Electrical data

Consumption	1
Performance	55
Ripple	3
Power Factor	0.96
Nominal Voltage	24

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	55
CRI CCT	930
Glare Indicator Ugr Longwise Optics	26
Glare Indicator Ugr Parallel Optics	27

Light distribution

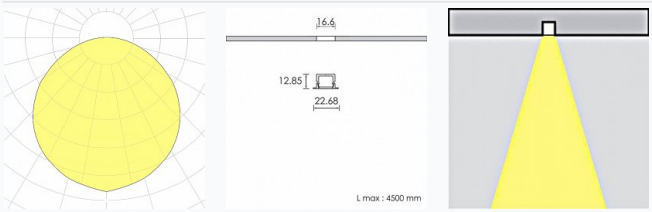

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%