
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS IN SMALL



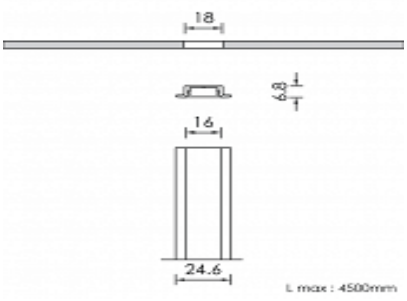

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRR0592CL001DA
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	25
Length	100
Height	7


Electrical data

Consumption	1,5
Performance	70.33
Ripple	3
Power Factor	0.96
Nominal Voltage	24

Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	105.5
CRI CCT	940
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	29

Light distribution

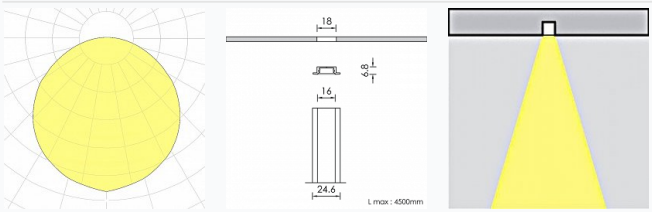

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%