

# NOTUS 25 TRIMLESS A

CE LM80 LM79 TM21 REACH CE LM

TM21 REACH CE LM80 LM79 TM21 REA

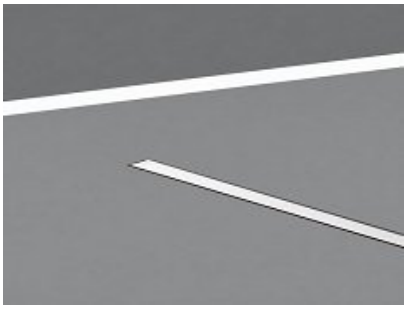

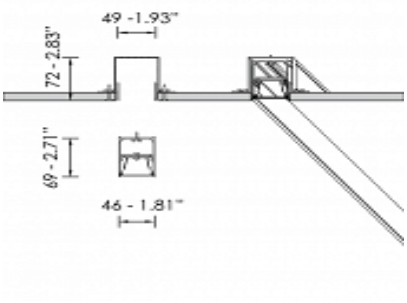


## Product Details

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRT0053CL002ON |
| Product family | NOTUS |
| Diffuser | PMMA |
| Control Gear | Built-in ECG |
| Width | 49 |
| Length | 2276 |
| Height | 72 |


### Electrical data

| | |
|---|---|
| Consumption | 67,6 |
| Performance | 76.05 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 104º |
| Luminous Flux | 5141 |
| CRI CCT | 930 |
| Glare Indicator Ugr Longwise Optics | 25 |
| Glare Indicator Ugr Parallel Optics | 26 |

### Light distribution

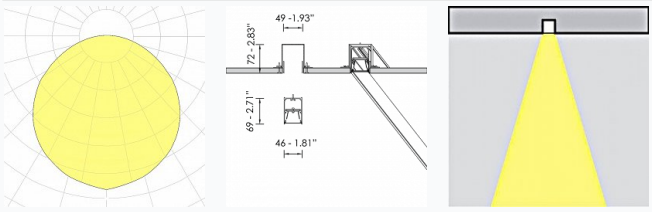


### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 54 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >80.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |