

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOTUS 16 STATUS IP44

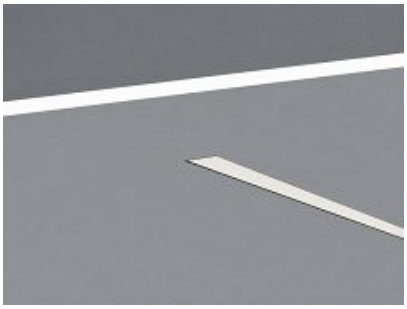

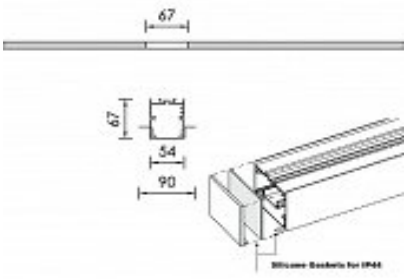

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRR0661CL001ON
Product family	NOTUS
Diffuser	ANTI-GLARE PMMA
Control Gear	Built-in ECG
Width	54
Length	1420
Height	67


Electrical data


Consumption	42,2
Performance	95
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	104º
Luminous Flux	4009
CRI CCT	940

Light distribution







Safety characteristics

IK	04
IP	44
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%