

HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NOTUS 16 TRIMLESS A UGR19

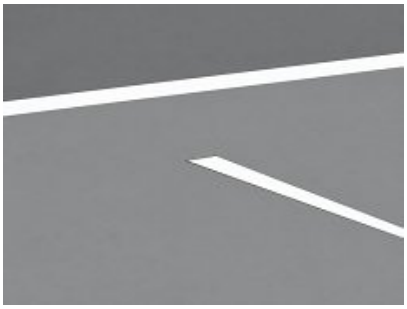

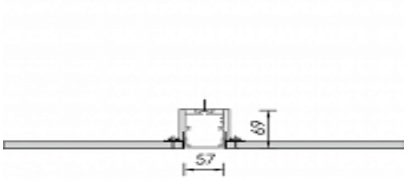

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRT0287CL001DAC
Product family	NOTUS
Diffuser	PMMA
Control Gear	Built-in ECG
Width	57
Length	590
Height	69


Electrical data

Consumption	10
Performance	102
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	XW
Beam	78º
Luminous Flux	1020
CRI CCT	930

Light distribution

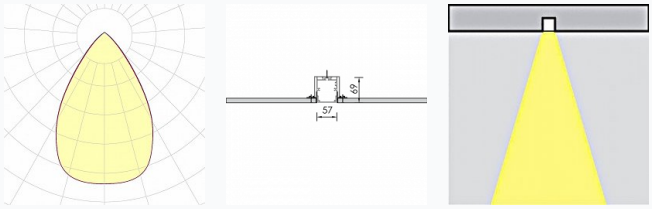

Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>100.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%