


HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

COMIS 10 STATUS

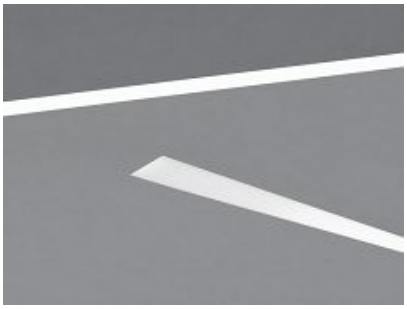



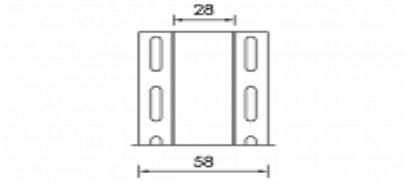

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	PRT0598CL001DAC
Product family	COMIS
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	58
Length	1000
Height	12


Electrical data


Consumption	19,2
Performance	70
Ripple	3
Power Factor	0.96
Nominal Voltage	24


Luminaire Output

Beam Type	VW
Beam	119º
Luminous Flux	1344
CRI CCT	940
Glare Indicator Ugr Longwise Optics	27
Glare Indicator Ugr Parallel Optics	28

Light distribution







Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L70B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%