


HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# COMIS 10 STATUS

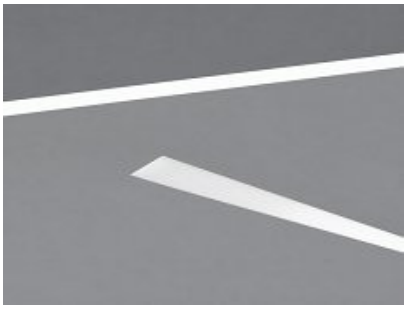

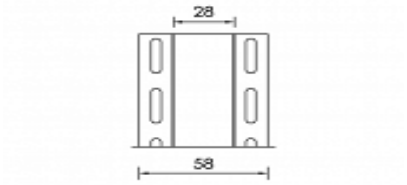


## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | PRT0599CL003ON |
| Product family | COMIS |
| Diffuser | PMMA |
| Control Gear | Remote Electronic Driver |
| Width | 58 |
| Length | 1000 |
| Height | 12 |


### Electrical data


| | |
|---|---|
| Consumption | 30 |
| Performance | 70 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 24 |


### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 119º |
| Luminous Flux | 2100 |
| CRI CCT | 940 |
| Glare Indicator Ugr Longwise Optics | 28 |
| Glare Indicator Ugr Parallel Optics | 29 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 40 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L70B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |