
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

FUGA 2 RING SEDO SP UP DOWN



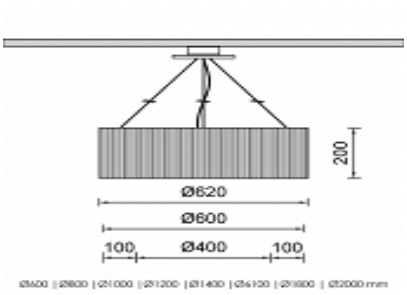

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Acoustic Panel
Product code	PRA0175CL002DAC
Product family	FUGA
Diffuser	PMMA
Control Gear	Built-in ECG
Height	200


Electrical data


Consumption	178,8
Performance	63.28
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	VW
Beam	360º
Luminous Flux	11264
CRI CCT	940
Glare Indicator Ugr Longwise Optics	11
Glare Indicator Ugr Parallel Optics	12

Light distribution







Safety characteristics

IK	04
IP	40
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>80.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%